


200mm X 200mm X 60mm RED
DOUBLE COBBLESTONE BY DECRA-LOC
or EQUIVALENT

60mm MASONARY SAND SETTING BED

GEOTEXTILE (TERRAFIX GEOGRID TENSAR
BX1100) or EQUIVALENT
TURNED UP ALONG PERIMETER


TREE PIT BRICK INSTALLATION

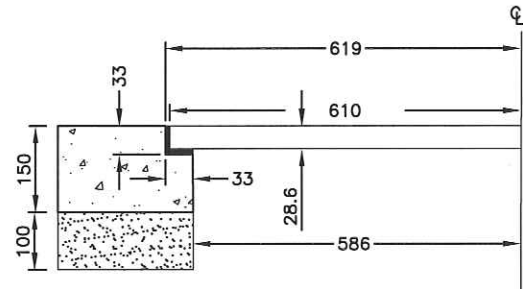

1220mm X 1220mm CAST IRON TREE GRATE.
TRYSTAN TP-48 or EQUIVALENT TO BE SET FLUSH
WITH TOP OF SIDEWALK.

CAST IRON FRAME SUPPLIED WITH GRATE

TREE PIT GRATE INSTALLATION

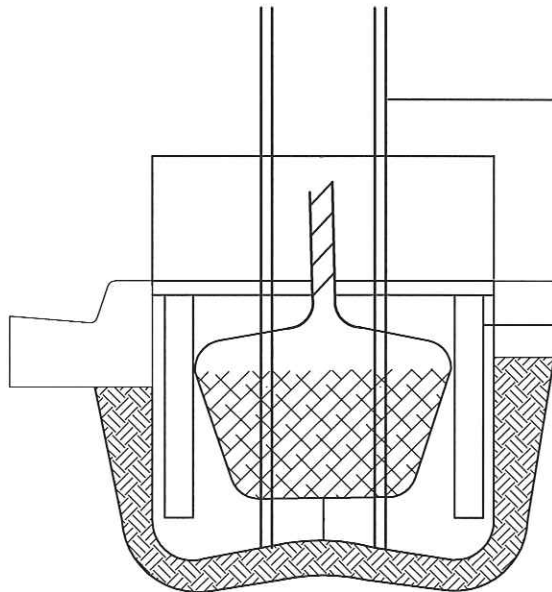


TWO 30mm X 38mm T-BAR IRON STAKE,
MIN. 2440mm LONG PAINTED FLAT BLACK.
DRIVE STAKES SECURELY INTO SOIL.

OR

TREE GUARD TRYSTAN T6-4 OR EQUIVALENT

IRRIGATION RISER
ALL FOUR CORNERS
REFER TO DETAIL

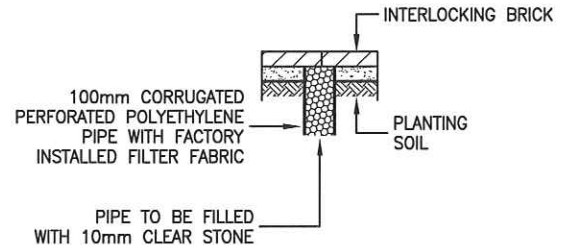

IRRIGATION RISER DETAIL

NOTES:

1. ALL PLANT MATERIAL TO CONFORM TO ONTARIO LANDSCAPE SPECIFICATIONS.
2. PAINT ALL CUTS TO ROOTS AND BRANCHES OVER 12mmØ WITH APPROVED TREE PAINT.
3. WRAP ALL TREES WITH APPROVED TREE WRAP FROM THE TOP OF THE ROOT BALL TO ABOVE SECOND BRANCH.
4. FIRMLY COMPACT BACKFILLED SOIL TO ELIMINATE AIR POCKETS AND PREVENT SETTLEMENT.
5. CUT AND REMOVE BURLAP FROM TOP 1/3 OF ROOT BALL.
6. SET TREE'S NATIVE GRADE MARK AT 50mm ABOVE PLANTING GRADE TO ALLOW FOR SETTLEMENT. DO NOT COMPACT.
7. IRRIGATION RISER REQUIRED FOR BRICK INSTALLATION ONLY.

NEW TREE PLANTING DETAIL

APPROVED

[Signature]
DIRECTOR OF ENGINEERING

DATE: JUNE 5/12

CITY OF BURLINGTON
ENGINEERING DEPARTMENT

STREETSCAPE DETAILS
TREE PIT DETAILS

METRIC
SCALE: N.T.S.

DWG. NO.

S-142