

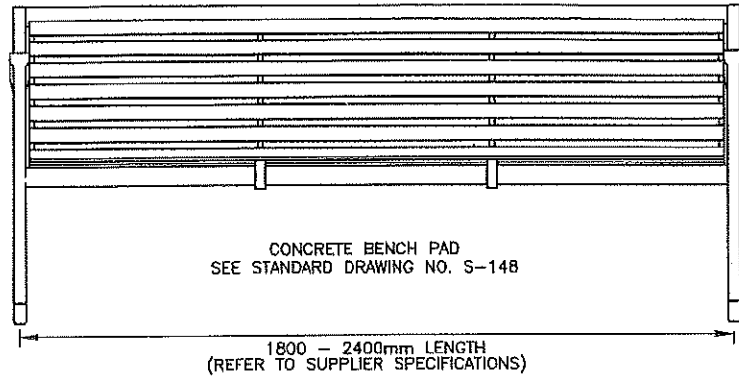


DATE: JULY/14

NEW




APPROVED MANUFACTURERS AND MODELS:		
MANUFACTURER	MODEL	NOTES
DUMOR INC.	68-296	--
DUMOR INC.	68-348-004	PLAQUE READY
STRESSCRETE GROUP	KDB30-6	--
STRESSCRETE GROUP	KDB30-6-PL	PLAQUE READY
LANDSCAPE FORM	LAKESIDE 6' LENGTH	POWDER COATED METAL WITH ARMS AND BACK GRASS OR LEAF PATTERN, OR CUSTOM MOTIF AS APPROVED
HAUSER INDUSTRIES INC.	PS-615-AL-SD	--
HAUSER INDUSTRIES INC.	PS-615-AL-SD-SP	PLAQUE READY
OTHER PRODUCT EQUIVALENTS AS APPROVED BY THE CONTRACT ADMINISTRATOR		MEETS DIMENSIONAL, MATERIAL, AND APPEARANCE SPECIFICATIONS

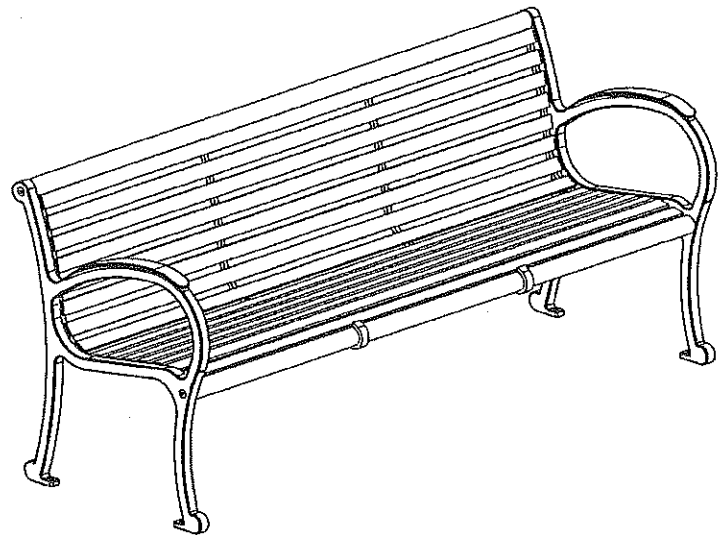

NOTES:

- BENCH ANCHORS TO BE STAINLESS STEEL "THEFT PROOF" AND SPACED ACCORDING TO DIMENSIONS AS SPECIFIED BY BENCH MANUFACTURER.
- BENCH TO HAVE SKATEBOARD CLIPS/STOPS AND PLACED ACCORDING TO LOCATION SPECIFIED BY BENCH MANUFACTURER.
- BENCHES SHALL:
 - BE CONSTRUCTED WITH NO SHARP EDGES OR PINCH POINTS;
 - BE COMMERCIAL DUTY ALUMINUM OR STEEL CONSTRUCTION AND ALL STEEL COMPONENTS TO BE TREATED AGAINST CORROSION PRIOR TO PAINT;
 - BE WELDED CONSTRUCTION WHERE POSSIBLE;
 - HAVE FOUR LEG DESIGN WITH ANCHOR MOUNTING HOLES IN EACH;
 - BE ADJACENT TO AN ACCESSIBLE ROUTE COMPLYING WITH 4.1.4 OF COB ACCESSIBILITY STANDARDS;
 - BE STABLE;
 - HAVE A SEAT HEIGHT BETWEEN 450 MM (17-3/4 IN.) AND 500 MM (19-5/8 IN.) FROM THE GROUND;
 - HAVE ARM AND BACK RESTS;
 - BE POWDER COATED BLACK PAINT OR OF CONTRASTING COLOUR TO THEIR BACKGROUND, AND;
 - HAVE MAXIMUM SPACING OF 1" BETWEEN SEAT SLATS.
- A REQUIREMENT FOR THE BENCH TO BE RECOGNITION PLAQUE READY VIA RECESS OR OPENING MAY BE REQUESTED BY THE CONTRACT ADMINISTRATOR.
- MANUFACTURER AND MODEL NUMBER SELECTION MAY BE MORE PRESCRIPTIVE FOR DESIGNATED AREAS (FOR CONSISTANT DESIGN) AS PER CONTRACT ADMINISTRATOR DIRECTION.

DIMENSIONS IN mm EXCEPT AS NOTED

APPROVED  DIRECTOR OF ENGINEERING DATE: July 25/2014	CITY OF BURLINGTON ENGINEERING DEPARTMENT	METRIC SCALE: N.T.S.
	STREET BENCH	DWG. NO. S-147