





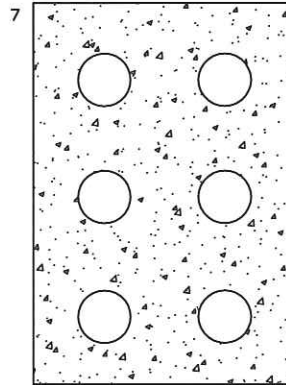






50mm DUCTS





75mm DUCTS



100mm DUCTS



COMBINATION OF 3, 5 & 11

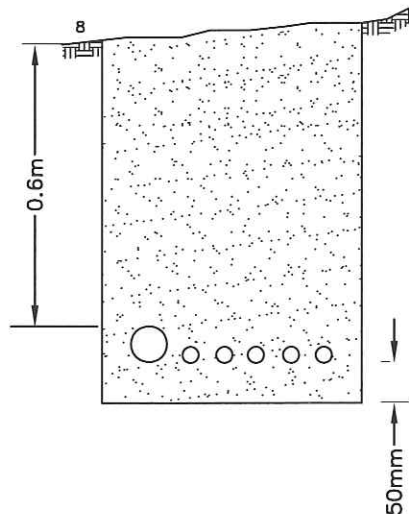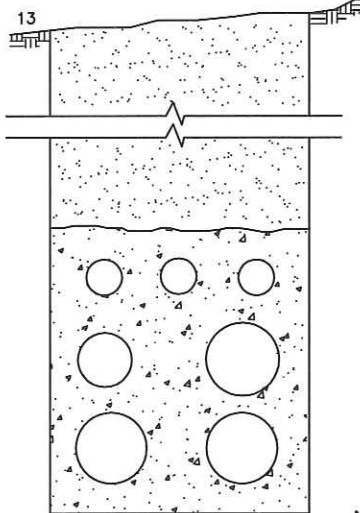

NOTES:

- 1) CONCRETE TO BE AS PER C-2 (ITEM 11-CONCRETE) CITY OF BURLINGTON AMENDMENTS TO OPSS
- 2) MIN. CONCRETE ENVELOPE OF 75mm ON ALL DUCTS WITH A MIN. OF 50mm BETWEEN ALL DUCTS
- 3) ALL DUCT STRUCTURES TO BE BURIED A MIN. OF 1.0m BELOW GRADE
- 4) ALL RANDOM SPACED CABLES BURIED TO A DEPTH OF 1.0m WITH A 50mm BASE AND 250mm COVER OF SAND. REMAINDER TO BE EXCAVATED MATERIAL FREE OF DEBRIS. STREETLIGHT CABLES MUST HAVE A MIN. DEPTH OF 600mm
- 5) MANY SECTIONS OF DUCT MAY BE A COMBINATION OF THE ABOVE (SEE FIGURE 13)
- 6) A MIN. OF 4.7mm POLYPROPYLENE FISH ROPE TO BE PULLED INTO EACH DUCT

APPROVED

DIRECTOR OF ENGINEERING

DATE: JUNE 5/12.

CITY OF BURLINGTON
ENGINEERING DEPARTMENT

TYPICAL DUCT DETAILS

METRIC

SCALE: N.T.S.

DWG. NO.

S-150