



GEODETIC BM ELEV. = 97.055m  
CITY OF BURLINGTON BENCHMARK NO. 203.

GEODETIC BM ELEV. = 97.915m  
CITY OF BURLINGTON BENCHMARK NO. 278.


**NOTE TO CONTRACTOR :**  
DO NOT SCALE DRAWINGS.  
CONTRACTORS MUST CHECK AND VERIFY ALL DIMENSIONS AND REPORT ANY DISCREPANCIES TO THE ENGINEER BEFORE PROCEEDING WITH THE WORK.  
ALL DRAWINGS REMAIN THE PROPERTY OF THE ENGINEER AND SHALL NOT BE REPRODUCED OR REUSED WITHOUT THE ENGINEER'S WRITTEN PERMISSION.  
THE OWNER/ARCHITECT/CONTRACTOR IS ADVISED THAT M.T.E. CONSULTANTS INC. CANNOT CERTIFY ANY COMPONENT OF THE SITE WORKS NOT INSPECTED DURING CONSTRUCTION. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO NOTIFY M.T.E. CONSULTANTS INC. PRIOR TO COMMENCEMENT OF CONSTRUCTION TO ARRANGE FOR INSPECTION.

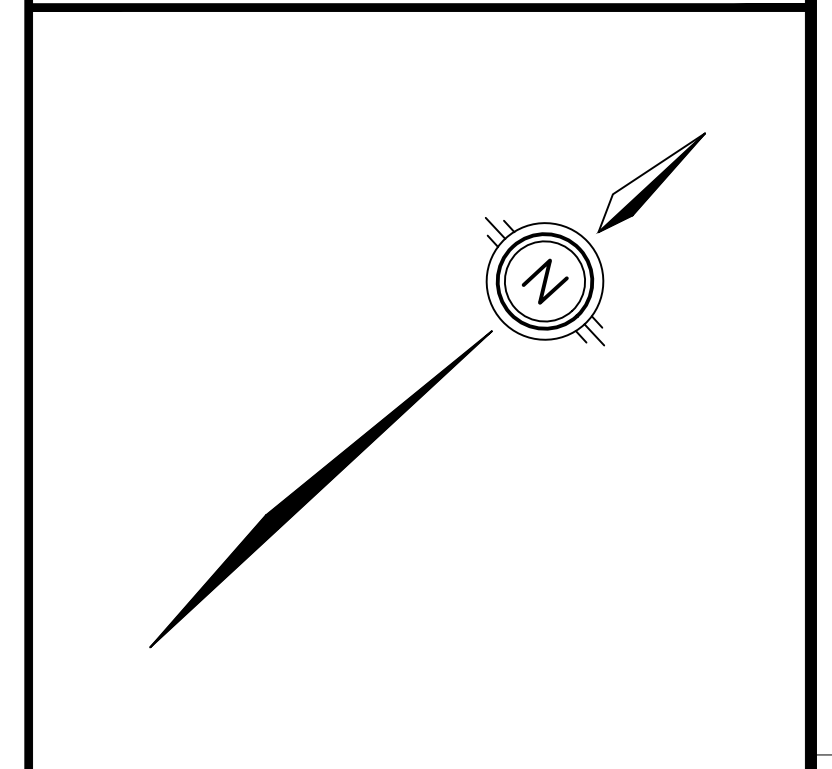


**LEGEND OF EXISTING FEATURES**

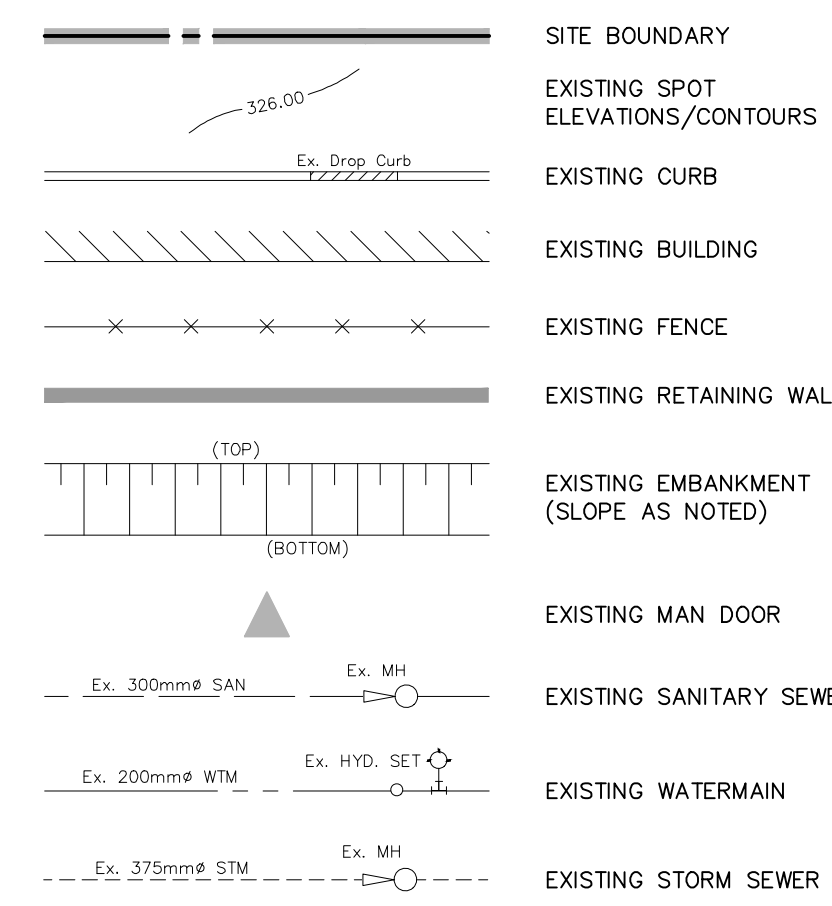

**LEGEND OF PROPOSED FEATURES**

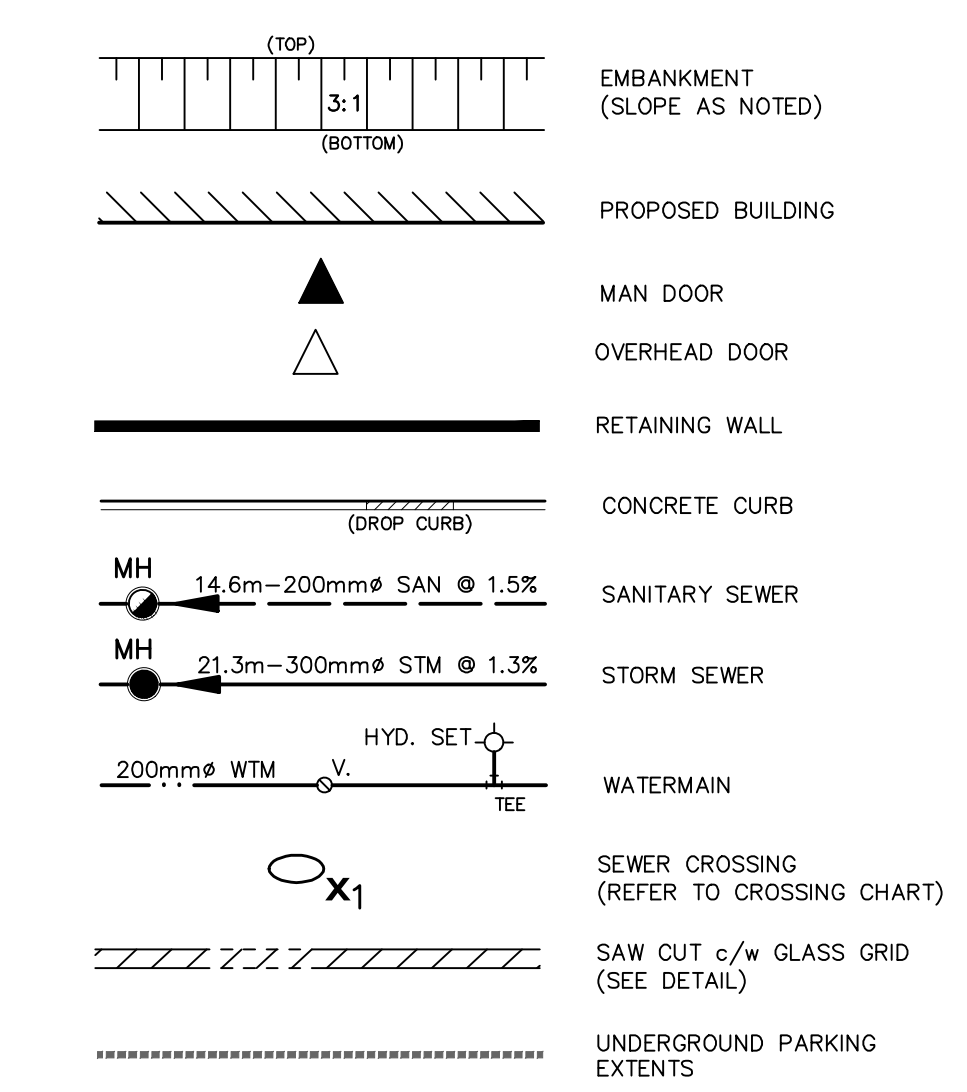

| SEWER CROSSING CHART |            |                  |                    |   |
|----------------------|------------|------------------|--------------------|---|
| CROSSING #           | SEWER TYPE | SEWER SIZE (mm#) | CROSSING ELEVATION | NOTES                                     |
| X1                   | WTM        | 150              | INV=102.45±        | MAINTAIN MIN 0.15m OF VERTICAL SEPARATION |
|                      | EX. STM    | 600              | OBV=102.25±        |   |
| X2                   | EX. STM    | 300              | INV=102.61±        | MAINTAIN MIN 0.15m OF VERTICAL SEPARATION |
|                      | SAN        | 150              | OBV=101.15±        |   |
| X3                   | EX. WTM    | 150              | INV=102.58±        | MAINTAIN MIN 0.15m OF VERTICAL SEPARATION |
|                      | SAN        | 150              | OBV=101.09         |   |

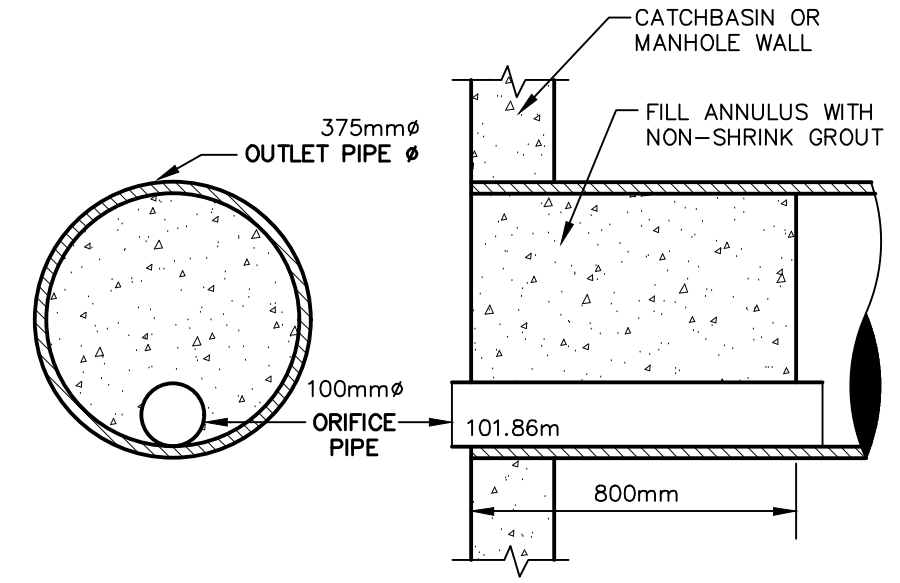

**NOTES TO CONTRACTOR:**

- INSPECTION**  
CONTRACTOR IS RESPONSIBLE FOR CONTACTING ENGINEER 48 HRS PRIOR TO COMMENCING WORK TO ARRANGE FOR INSPECTION. ENGINEER TO DETERMINE DEGREE OF INSPECTION AND TESTING REQUIRED FOR CERTIFICATION OF UNDERGROUND SERVICE INSTALLATION AS MANDATED BY ONTARIO BUILDING CODE DIVISION C, PART 1, SECTION 1.2.2. GENERAL REVIEW. FAILURE TO NOTIFY ENGINEER WILL RESULT IN EXTENSIVE POST CONSTRUCTION INSPECTION AT CONTRACTORS EXPENSE.
- CONFIRMATION OF EXISTING INVERTS**  
72 HOURS PRIOR TO THE START OF CONSTRUCTION, THE CONTRACTOR IS TO LOCATE, EXPOSE AND VERIFY INVERTS OF EXISTING SEWERS AT CONNECTION POINTS AND REPORT FINDINGS TO MTE. SHOULD THE CONTRACTOR PROCEED WITHOUT COMPLETING THESE LOCATES, EXTRA COSTS RESULTING FROM DELAYS AND STANDBY TIME WILL NOT BE CONSIDERED.
- SHOP DRAWINGS**  
CONTRACTOR TO PROVIDE SHOP DRAWINGS TO THE ENGINEER FOR REVIEW AND APPROVAL FOR ALL CHAMBERS AND STRUCTURES PRIOR THE START OF CONSTRUCTION AND PRIOR TO ORDERING ANY STRUCTURES AND PARTS.

|    |                    |     |            |
|----|--------------------|-----|------------|
| 8. |                    |     |            |
| 7. |                    |     |            |
| 6. |                    |     |            |
| 5. |                    |     |            |
| 4. |                    |     |            |
| 3. |                    |     |            |
| 2. |                    |     |            |
| 1. | ISSUED FOR IZB/OPA | KRR | JAN. 11/19 |
|    | NO. REVISION       | BY  | DATE       |

**MTE**  
Engineers | Scientists | Surveyors  
(905) 639-2552 www.mte85.com

LIV COMMUNITIES  
1005 SKYVIEW DRIVE, SUITE 301 BURLINGTON

6 STOREY RESIDENTIAL BUILDING  
1085 CLEARVIEW AVENUE BURLINGTON

PRELIMINARY SERVICING PLAN

Project Manager: K.RAMSEWAK Project No: 44795-100  
Design By: ALP Checked By: KRR  
Drawn By: ALP Checked By: KRR  
Surveyed By: OTHERS Drawing No:  
Date: Dec.11/18  
Scale: 1:250 Sheet 3 of 3