Acoustical Consultants Inc.
P.O Box 32059
1447 Upper Ottawa St
Hamilton ON L8W 3K0
905-383-9491
1-833-212-4858
www.dbaservices.ca

ENVIRONMENTAL NOISE IMPACT STUDY

"2294-2300 QUEENSWAY DRIVE"

City of Burlington
Municipality of Halton Region

Prepared for:

Waggy Inc.
69 Markland Street
Hamilton, ON
L8P 2J8

Prepared By:

Melissa MacLean
Vice President

REGISTERED PROFESSIONAL ENGINEER
V. M. ZINGARO
PROVINCE OF ONTARIO
Dec 4 2019

Revised Report December 2019

Our File No: 19-1199

TABLE OF CONTENTS

1.0 INTRODUCTION..... Page 3

2.0 SITE DESCRIPTION..... Page 3

3.0 NOISE IMPACT ASSESSMENT..... Page 3
3.1 Noise Criteria..... Page 3
3.2 Road Noise……..... Page 4

4.0 RECOMMENDATIONS.....…… Page 6
4.1 Outdoor Noise Levels.....…… Page 6
4.2 Indoor Noise levels…… Page 7

5.0 VENTILATION/WARNING CLAUSES.…….. Page 7

6.0 SUMMARY OF CONCLUSIONS..... Page 7

7.0 CONCLUSIONS…….. Page 8

FIGURE 1 – Site Location
FIGURE 2 – Site Plan
FIGURE 3- Receptor Locations

APPENDIX “A”

QEW Traffic Data
City of Burlington Traffic Data
Stamson Calculations
Site Statistics
EW2 Wall Construction
Elevation Plans

1.0 INTRODUCTION

dBA Acoustical Consulting Inc. has been retained to conduct a noise impact study on behalf of Waggy Inc. for the proposed "2294-2300 Queensway Drive" townhouse development, located in Burlington, ON.

The purpose of the study is to determine the noise impact from the QEW and Queensway Drive vehicular traffic that may impact the proposed residential development, as required for site plan approval for the City of Burlington. Proposed for the site are four Blocks of residential dwellings. Blocks 1-3 consisting of a total of 17, three storey townhouse units and Block 4 consisting of 8, three storey back-to-back townhouse units with a rooftop terrace.

This study will detail noise impact relative to the site plan and recommend noise control measures necessary (if applicable) to meet MOE Publication NPC-300 entitled "Stationary & Transportation Sources-Approval & Planning guidelines while satisfying the planning requirements of the City of Burlington and the Region of Halton. CN Rail Warning Clauses are not required as the tracks are more than 300m from the proposed site.

Vibration is not considered as there are no heavy industrial operations in the area of the proposed development. Aircraft is not a concern as the development is located outside the NEF 25 contour of the area. The CN Rail is located 320m north of the proposed development site. Due to extensive noise levels from the QEW, the major roadway, distance separation, and shielding from the QEW, CN Rail will have no acoustical impact on the proposed site. See attached Figure 1.

2.0 SITE DESCRIPTION

The proposed site property is located immediately on the south side of the Queensway Drive and approximately 122m south of the QEW (HWY 403). To the east is Guelph Line located approximately 650m from the proposed development site. Located on Queensway Drive to the west are existing commercial properties and to the east are residential properties.

The QEW is partially shielded by existing earth berms to the west and the angle to which the QEW turns at Brant Street. The earth berm to the west of the proposed development site has an average height of 7m above the development site grade. Queensway Drive traffic is considered in this report and the traffic volumes are low compared to the AADT of the QEW. Site Plan is attached in Figure 2.

The QEW is an 8-lane Highway and is the main noise source and is located approximately122m north from the building façade of the proposed development. The QEW has a posed speed of 100 km/hr. and runs east to west from the proposed site. The earth berms of the QEW to the west provides shielding of traffic due to the elevation difference. The posted QEW speed limit is 100 km/hr.

Queensway Drive is a 2-lane roadway and located approximately 10m from the front facades of Block 1 and Block 4 of the proposed residential development. The posted speed for Queensway Drive is 50 km/hr.

3.0 NOISE IMPACT ASSESSMENT

3.1 NOISE CRITERIA

The Ministry of Environment (MOE) specifies limits for road noise relative to new residential developments. The MOE Publication NPC-300 entitled "Stationary & Transportation Sources-Approval & Planning, specifies the criteria, summarized as follows:

TABLE1- Road Traffic Sound Levels Limits	
Time Period	**Leq (dBA)**
07:00 – 23:00 (16 hr.)	55 Outdoor Living area
07:00 – 23:00 (16 hr.)	55 Plane of Window
23:00 – 07:00 (8 hr.)	50 Plane of Bedroom window

The OLA refers to an outdoor patio, a terrace or other area where outdoor passive recreation is expected. Noise levels are calculated at the upper storey bedroom window to represent nighttime (23:00-0700) periods.

Where noise levels estimated at the first-floor window (POW) are equal to or less than the values listed in Table 1, no noise control measures are required. Where noise levels exceed Table 1 values, the following action is required:

TABLE 2 –Noise Control Requirements		
Time Period	**Noise Level Leq (dBA)**	**Action Required**
07:00 - 23:00 Daytime (OLA)	56 to 60	Warning Clause Type "A"
	> 60	Barrier & Warning Clause Type "B"
07:00 – 23:00 Daytime (POW)	>55	Provision for A/C, Warning Clause "C"
	>65	Central A/C, Warning Clause "D"
	>65	Building Component Specification
23:00 to 07:00 Nighttime (POW)	> 50	Provision for A/C and Warning Clause Type "C"
	> 60	Building Component Specification
	> 60	Central Air and Warning Clause Type "D"

Where nighttime noise levels exceed 60 dBA, building components must be designed to meet Table 3 indoor sound level limits.

TABLE 3 - Indoor Road Sound Levels Limits	
Indoor Location	**Leq (dBA)**
	Road
Living/Dining/ Bedroom 7:00 – 23:00	45
Living/Dining/ Bedroom 23:00 - 07:00	40

3.2 ROAD NOISE

Predicted road traffic noise levels were calculated for both the QEW and Queensway Drive, the major road noise sources in the area. Road traffic volumes for Queensway Drive AADT 2015 (Annual Average Daily Traffic) were sourced by the City of Burlington 2016 AADT Map Traffic Data. (See Appendix "A"). The QEW road traffic volumes AADT 2016 (Annual Average Daily Traffic) were sourced by the MTO website. See Appendix "A"

The MOE computer program STAMSON version 5.04 was used to carry out prediction calculations (See Appendix "A"). Traffic data is summarized in Table 4. The daytime/nighttime volume ratios relative to QEW is calculated using a 66/33 split and the MTO require the noise levels be calculated over a 24-hour period.

The QEW, an 8-lane roadway, has a maximum posted speed for all vehicles of 100 km/hr. The percentage of annual growth for the QEW was figured at 2.0% over 13 years. The AADT (Annual Average Daily Traffic) volumes were used considered the worst-case scenario.

QEW Truck volumes were factored at 8% medium and 12% heavy of the total vehicle volumes Table 5A summarizes the "free field" traffic noise prediction results, modeled at 6 receptor locations representative of the 1st and 3rd floor north facades, 1st and 3rd floor west and east facades throughout the proposed development. (See Figure 3 Receptor Locations).

The daytime/nighttime volume ratio relative to Queensway Drive, is calculated using an 90/10 split, as required by the MOE. The percentage of annual growth was figured at 2.0% over 14 years, volumes used are reflective of the worst-case scenario. Truck volumes were factored at 2.0% medium and 1.5% heavy of the total vehicle volumes for Queensway Drive. Table 5 summarizes the "free field" traffic noise prediction results, modeled at 6 receptor locations.

TABLE 4 – Future Road Traffic Volumes

QEW	**AADT 209694 Vehicles**		
	Cars	**Medium Trucks**	**Heavy Trucks**
East Bound	83877	8388	12582
West Bound	83877	8388	12582
Queensway Drive	**AADT 10750 Vehicles**		
	Cars	**Medium Trucks**	**Heavy Trucks**
Day	9433	97	145
Night	1048	11	16

The following Table 5A summarizes the QEW "free field" traffic noise prediction results, modeled at six receptor locations represents the north façade, east and west façades within the proposed development. (see Figure 3 Receptor Locations).

TABLE 5A – Predicted QEW Future Traffic Noise (dBA)

Location	**07:00 – 23:00**	**23:00 – 07:00**
R1- Blocks 1 & 4 (QEW)	70 (1)	70 (2)
R2- Blocks 1 & 4 (QEW)	72 (1)	72 (2)
R3- Blocks 1 & 4 (QEW) East & West Facades	67 (1)	67 (2)
R4- Blocks 1 & 4 (QEW) East & West Facades	69 (1)	69 (2)
R5- Block 3 (QEW) North Facades	66 (1)	66 (2)
R6- Blocks 3 (QEW) North Facades	67 (1)	67 (2)

(1) 1.5m receiver height (2) 7.0m receiver height

The following Table 5B summarizes Queensway Drive "free field" traffic noise prediction results, modeled at one receptor location represents the north façade of Block 4 & 1 of the proposed development. Road surface was considered reflective source and is considered the worst-case scenario for Queensway Drive traffic noise.

TABLE 5B – Predicted Queensway Drive Future Traffic Noise (dBA)		
Location	**07:00 – 23:00**	**23:00 – 07:00**
R1- Blocks 1 & 4 (Queensway Dr)	61 (1)	54 (2)

(1) 2.0m receiver height (2) 7.0m receiver height

The following Table 5C summarizes the "Combined" QEW & Queensway Drive traffic noise prediction results, modeled at six receptor locations represents the north façade and east façade within the proposed development. Traffic noise level from Queensway Drive & the QEW are combined in the following Table 5C. Traffic noise from Queensway Drive is below 10dba from the QEW traffic noise therefore; the QEW traffic noise is the predominant traffic noise source and Queensway Drive has no acoustical impact on the proposed development.

TABLE 5C – Combined QEW & Queensway Drive Future Traffic Noise (dBA)		
Location	**07:00 – 23:00**	**23:00 – 07:00**
R1- Blocks 1 & 4 (QEW) First Floor	70 (1)	70 (1)
R2- Blocks 1 & 4 (QEW) Top Floor	72 (2)	72 (2)
R3- Blocks 1 & 4 (QEW) East & West Facades First Floor	67 (1)	67 (1)
R4- Blocks 1 & 4 (QEW) East & West Facades Top Floor	69 (2)	69 (2)
R5- Block 3 (QEW) North Facades First Floor	66 (1)	66 (1)
R6- Blocks 3 (QEW) North Facades Top Floor	67 (2)	67 (2)

(1) 2.0m receiver height (2) 7.0m receiver height

The following Table 5D summarizes the "Mitigated" QEW & Queensway Drive traffic noise prediction results with a 3.0m noise barrier for Block 1 OLA.

TABLE 5D – Mitigated OLA Traffic Noise Levels 3m Noise Barrier (dBA)		
Location	**07:00 – 23:00**	**23:00 – 07:00**
R7- Block 1 (OLA) 3m Noise Barrier	55(1)	NA

4.0 RECOMMENDATIONS - NOISE CONTROL

4.1 OUTDOOR NOISE LEVELS

Calculated road noise levels exceed the 55 dBA daytime criteria outlined in Table 1. The proposed development includes outdoor amenity spaces for the east Building and a 3.0m noise barrier is required. Building 4, a rooftop terrace is proposed. The rooftop terrace is less than 4.0m in depth and is not considered an outdoor amenity space as defined by the MOE, and as such no noise mitigation is required. **Although the rooftop terrace is not considered an Outdoor Amenity Space (OLA) sound levels due to increasing QEW road traffic will on occasions interfere with some activities of the dwelling occupants as the sound levels exceed the Municipality's and the Ministry of the Environment's noise criteria**.

In compliance with MOE guidelines, a noise barrier must have a minimum surface density of 20kg/m^2 and be designed and constructed without cracks or gaps. Any gaps under the noise barrier that are necessary for drainage purposes must be minimized and localized and must not deteriorate acoustical performance. (See Figure 4, Noise Barrier Location)

4.2 INDOOR NOISE LEVELS

Calculated nighttime road noise levels at the Plane of Window (POW) exceed the 50 dBA criteria outlined in Table 1 for indoor space for all residential units. Specific building components (walls, windows, doors etc.) are required and confirmed for indoor space for all residential units using the STC (Sound Transmission Class) method and are summarized in Table 6 following, with minimum window, door and wall construction specified throughout the development. The STC values are calculated for each room type, based on window to floor ratios of 80%.

TABLE 6 – Recommended Door, Wall and Window Construction

LOCATION	STC To Be Used	Wall	Door Construction
Blocks 1, 2, & 4			
Bedroom	**36**	**EW3**	**D4-sd**
Living room	**36**	**EW3**	**D4-sd**
Block 3			
Bedroom	**35**	**EW2**	**D4-sd**
Living room	**35**	**EW2**	**D4-sd**

5.0 VENTILATION / WARNING CLAUSES

Ventilation and warning clause requirements are required for this project as noted in Table 7 following. It is recommended that the appropriate warning clauses be inserted into all Offers and Agreements of Purchase and Sale or Lease.

TABLE 7 - Ventilation and Warning Clause Requirements

LOCATION	VENTILATION	WARNING CLAUSE
All Residential Units for All Blocks	Central Air Conditioning	Type “B” and “D”

The following are the required warning clauses.

TYPE B:

“Purchasers/tenants are advised that despite the inclusion of noise control features in the development and within the buildings units, sound levels due to increasing road traffic may on occasions interfere with some activities of the dwelling occupants as the sound levels exceed the Municipality’s and the Ministry of the Environment’s noise criteria.”

TYPE D:

“This dwelling unit has been supplied with a central air conditioning system which will allow windows and exterior doors to remain closed, thereby ensuring that the indoor sound levels are within the Municipality’s and the Ministry of the Environment’s noise criteria.”

6.0 SUMMARY OF RECOMMENDATIONS

The following noise control measures are required for this development:

- Table 6 recommends acoustically tested windows, walls, in Section 4.2 to ensure MOE compliance.

- Appropriate ventilation requirements and warning clauses are inserted into all Offers and Agreements of Purchase and Sale or Lease (Section 5, Table 7).
- 3.0m Noise Barrier required for east Building as noted in Figure 4.
- A Certificate of Acoustical Compliance will be issued once the Window supplier conforms STC value for windows will be installed.

It is recommended that a Qualified Acoustical Consultant certify that the required noise control measures have been incorporated into the builder's plans, prior to issuance of a building permit.

Prior to issuance of an occupancy permit, it is recommended the Qualified Acoustical Consultant certify that the approved noise control measures have been property installed.

7.0 CONCLUSIONS

dBA Acoustical Consulting Inc. has conducted a noise impact study on behalf of Waggy Inc. for the proposed "2294-2300 Queensway Drive" townhouse development, located in Burlington, ON.

The study determined the noise impact from the QEW, and Queensway Drive vehicular traffic t impacted the proposed residential development. This study detailed noise impact relative to the site plan and recommend noise control measures necessary to meet MOE Publication NPC-300 entitled "Stationary & Transportation Sources-Approval & Planning guidelines while satisfying the planning requirements of the City of Burlington and the Region of Halton.

FIGURE 1
SITE LOCATION



FIGURE 2
SITE PLAN

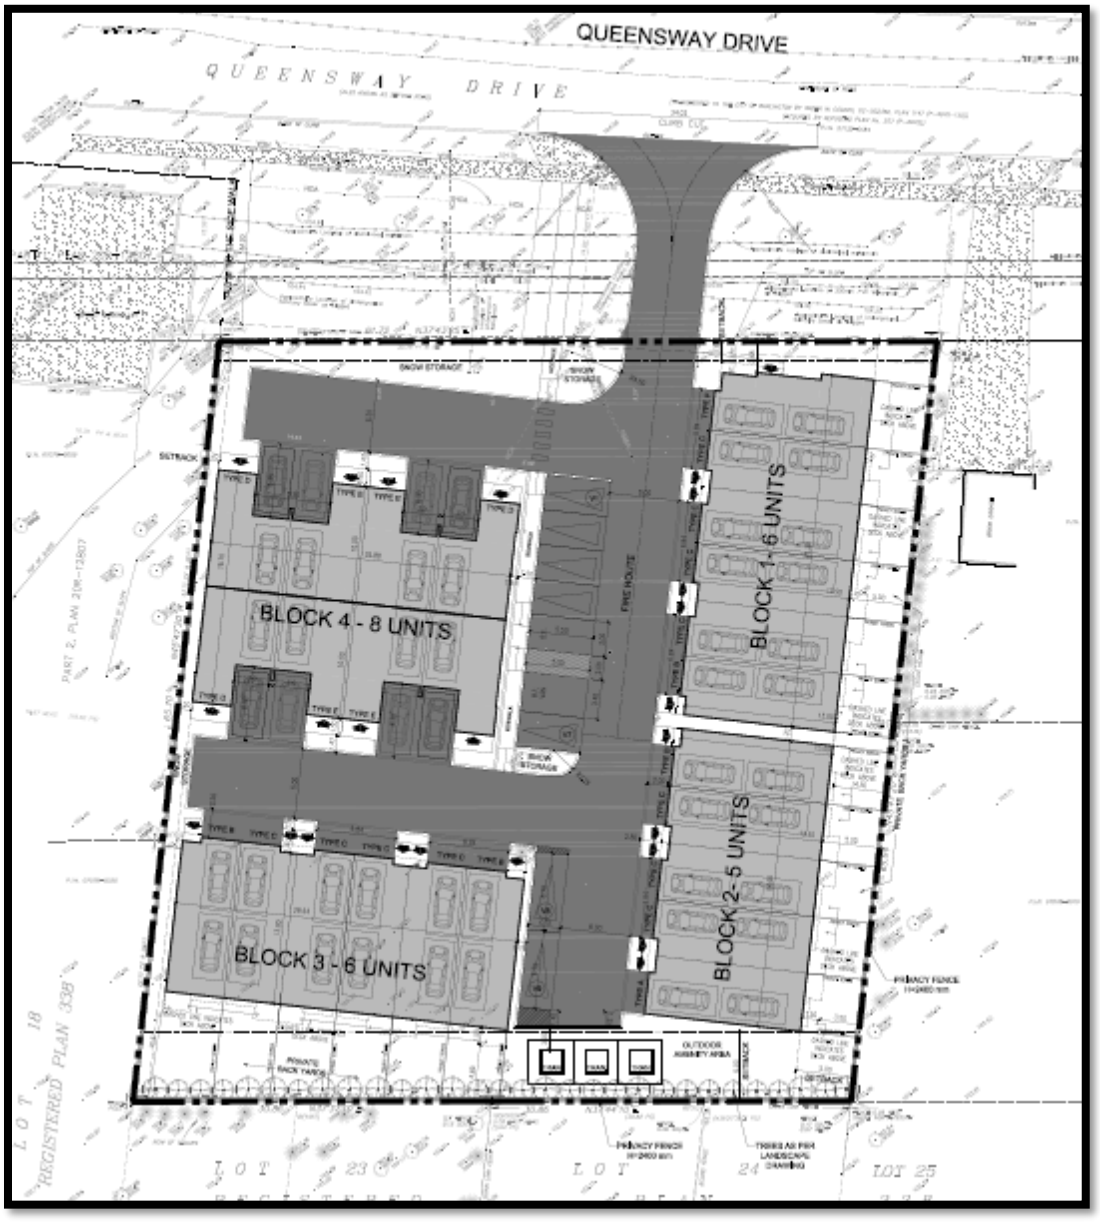
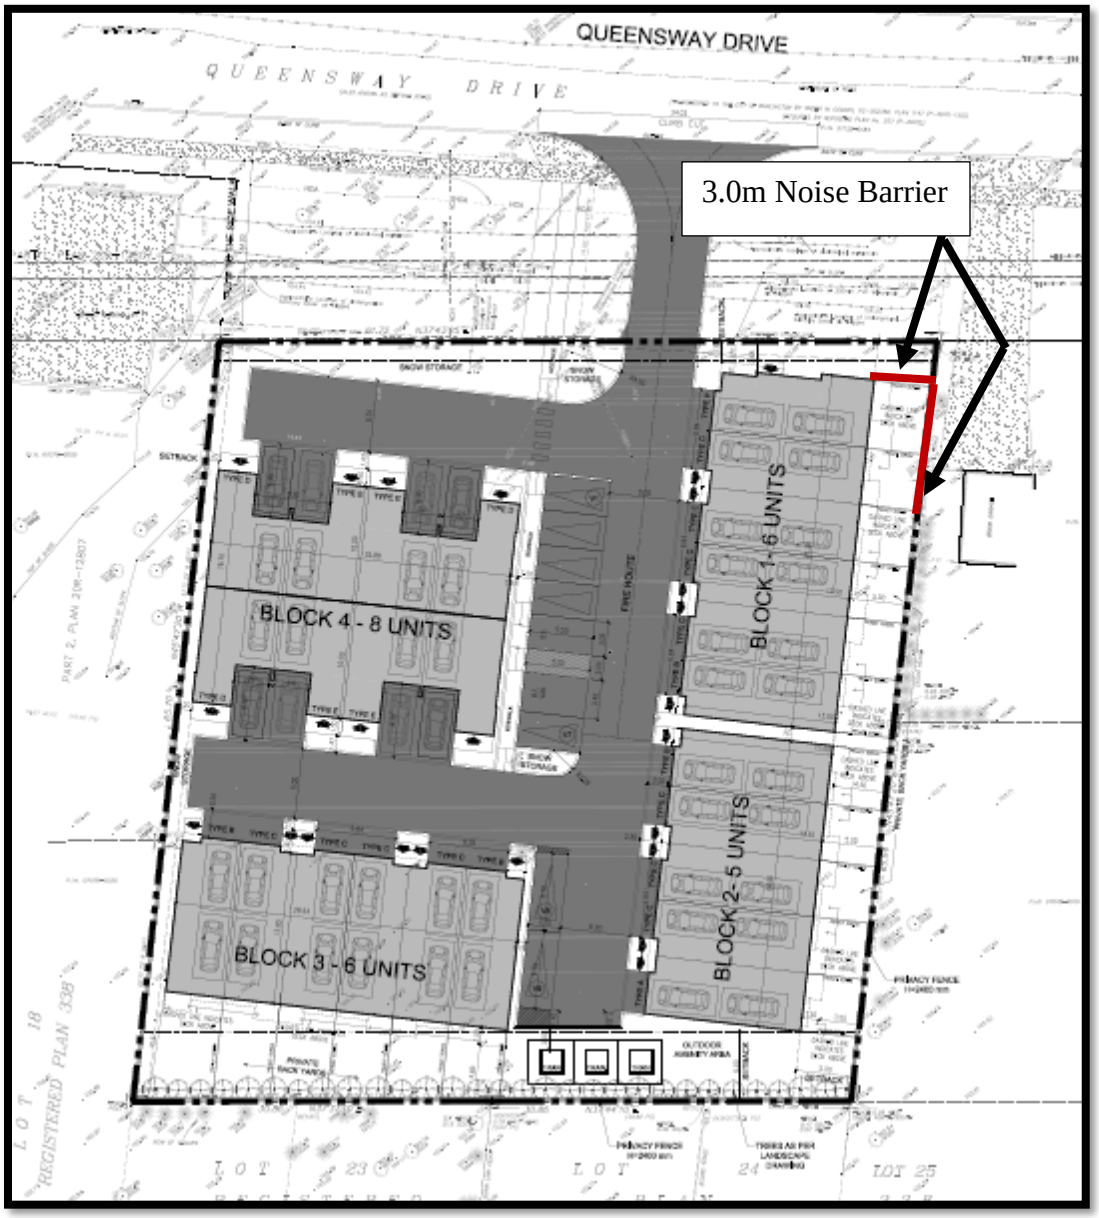


FIGURE 3
RECEPTOR LOCATIONS



FIGURE 4
NOISE BARRIER LOCATIONS


QUEENSWAY DRIVE
3.0m Noise Barrier
BLOCK 1 - 6 UNITS
BLOCK 2 - 5 UNITS
BLOCK 3 - 6 UNITS
BLOCK 4 - 8 UNITS


APPENDIX "A"


2016 QEW TRAFFIC DATA

Highway	Location Description From	Location Description To	Dist. (KM)	2016 AADT
QEW	FORT ERIE-GODERICH ST-PEACE BRIDGE PLAZA	CENTRAL AV IC	0.2	14,600
QEW	CENTRAL AV IC	CONCESSION RD IC-1	0.9	18,700
QEW	CONCESSION RD IC-1	THOMPSON RD IC-2	1.0	15,500
QEW	THOMPSON RD IC-2	GILMORE RD IC-5	2.4	17,700
QEW	GILMORE RD IC-5	BOWEN RD IC-7	2.0	24,200
QEW	BOWEN RD IC-7	NETHERBY RD IC-12 NIAGARA FALLS LTS	5.5	25,700
QEW	NETHERBY RD IC-12 NIAGARA FALLS LTS	SODOM RD IC-16	3.2	22,000
QEW	SODOM RD IC-16	LYONS CREEK RD IC-21	6.6	29,000
QEW	LYONS CREEK RD IC-21	MCLEOD RD IC-27	4.4	36,700
QEW	MCLEOD RD IC-27	HWY 420 IC-30	2.9	45,100
QEW	HWY 420 IC-30	THOROLD STONE RD IC-32	2.0	70,400
QEW	THOROLD STONE RD IC-32	MOUNTAIN RD IC-34	2.5	67,400
QEW	MOUNTAIN RD IC-34	HWY 405(WBL)IC-37	2.4	71,000
QEW	HWY 405(WBL)IC-37	GLENDALE AV IC-38	1.3	88,100
QEW	GLENDALE AV IC-38	NIAGARA ST SERVICE RDS	4.8	90,500
QEW	NIAGARA ST SERVICE RDS	NIAGARA ST IC-44	1.2	78,600
QEW	NIAGARA ST IC-44	LAKE ST IC-46	1.6	81,900
QEW	LAKE ST IC-46	ONTARIO ST IC-47	1.3	117,000
QEW	ONTARIO ST IC-47	MARTINDALE RD IC-48	0.7	97,400
QEW	MARTINDALE RD IC-48	HWY 406 IC-49	0.7	74,400
QEW	HWY 406 IC-49	SEVENTH ST IC-51	1.9	97,100
QEW	SEVENTH ST IC-51	JORDAN RD IC-55	4.3	98,100
QEW	JORDAN RD IC-55	VICTORIA AV IC-57	2.8	104,300
QEW	VICTORIA AV IC-57	ONTARIO ST IC-64	6.7	105,100
QEW	ONTARIO ST IC-64	BARTLETT AV IC-68	3.8	99,800
QEW	BARTLETT AV IC-68	MAPLE AV IC-71	2.5	99,300
QEW	MAPLE AV IC-71	CASABLANCA BV IC-74	3.6	107,100
QEW	CASABLANCA BV IC-74	FIFTY RD IC-78	3.5	112,300
QEW	FIFTY RD IC-78	FRUITLAND RD IC-83	5.1	120,300
QEW	FRUITLAND RD IC-83	HAMILTON 20 IC 88-CENTENNIAL PKWY	5.2	119,000
QEW	HAMILTON 20 IC 88-CENTENNIAL PKWY	BURLINGTON ST IC-89	1.6	130,000
QEW	BURLINGTON ST IC-89	EASTPORT RD IC-93 (7189)	4.0	135,000
QEW	EASTPORT RD IC-93 (7189)	HAMILTON HARBOUR ENTRANCE	0.9	149,400
QEW	HAMILTON HARBOUR ENTRANCE	NORTH SHORE BLVD IC 97	2.3	271,300
QEW	NORTH SHORE BLVD IC 97	FAIRVIEW ST IC-99	2.3	161,300
QEW	FAIRVIEW ST IC-99	HWY 403/407 IC-100	1.0	172,900
QEW	HWY 403/407 IC-100	BRANT ST IC 101	0.8	164,300
QEW	BRANT ST IC 101	GUELPH LINE IC-102	1.8	162,100
QEW	GUELPH LINE IC-102	WALKERS LINE IC-105	2.0	195,000
QEW	WALKERS LINE IC-105	APPLEBY LINE IC-107	2.0	190,000

CITY OF BURLINGTON

QUEENSWAY DRIVE TRAFFIC DATA

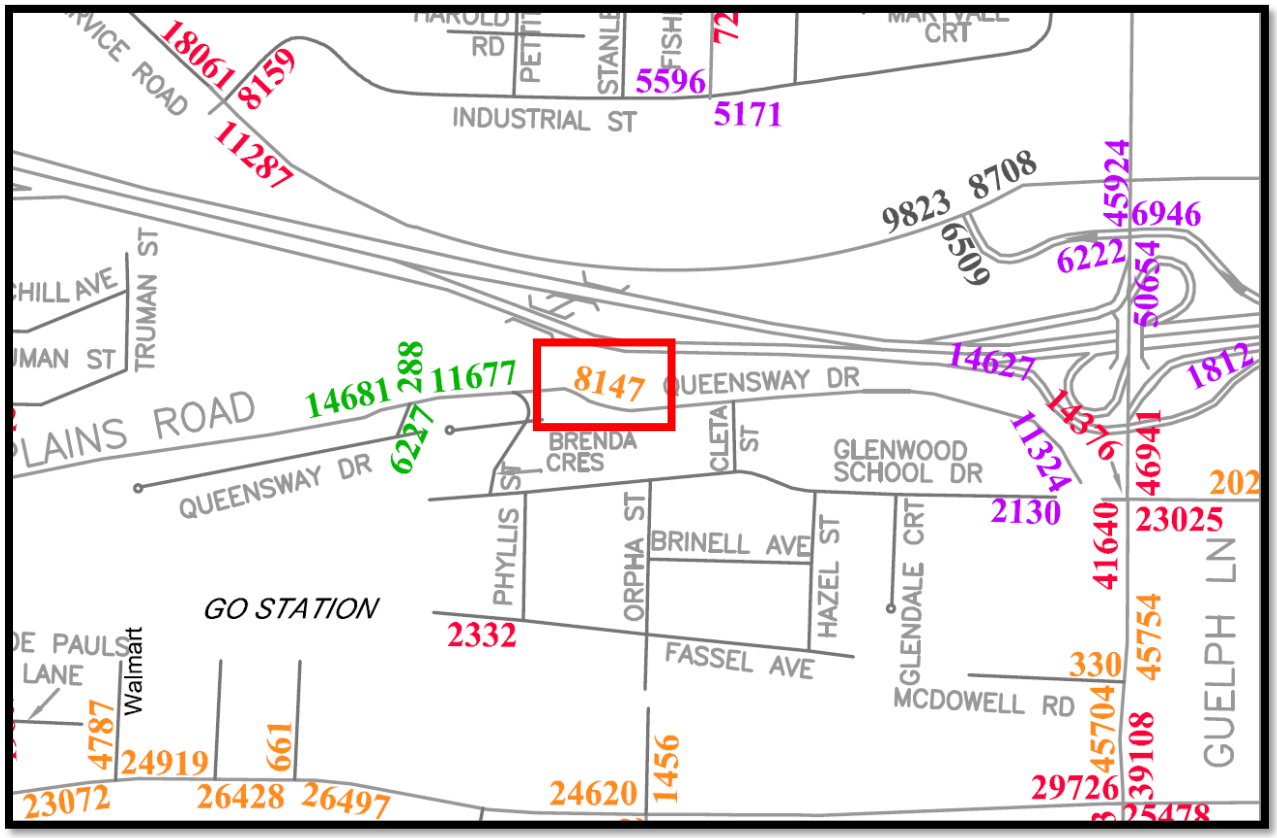

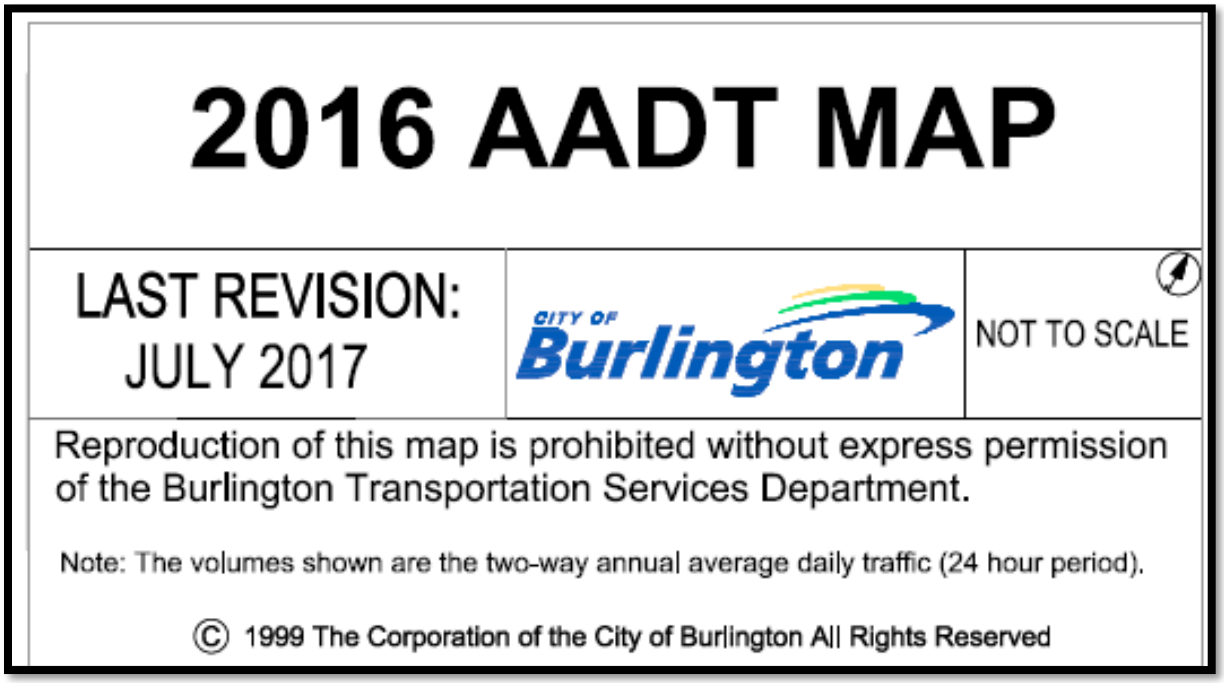

STAMPSON CALCULATIONS

```
STAMSON 5.04        SUMMARY REPORT        Date: 02-06-2019 20:40:28
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: R1Queens.te          Time Period: Day/Night 16/8 hours
Description: R1- Queensway Free Field Block 4 North Facade
                     TOTAL Leq FROM ALL SOURCES   (DAY): 61.01
                                                  (NIGHT): 54.47
Road data, segment # 1: Queensway Dr (day/night)
-----------------------------------------------
Car traffic volume  :  9433/1048  veh/TimePeriod  *
Medium truck volume :    97/11    veh/TimePeriod  *
Heavy truck volume  :   145/16    veh/TimePeriod  *
Posted speed limit  :    50 km/h
Road gradient       :     0 %
Road pavement       :     1 (Typical asphalt or concrete)

* Refers to calculated road volumes based on the following input:

    24 hr Traffic Volume (AADT or SADT):   8147
    Percentage of Annual Growth        :   2.00
    Number of Years of Growth          :  14.00
    Medium Truck % of Total Volume     :   1.00
    Heavy Truck  % of Total Volume     :   1.50
```

```
    Day (16 hrs) % of Total Volume     :  90.00

Data for Segment # 1: Queensway Dr (day/night)
-----------------------------------------------
Angle1   Angle2           : -90.00 deg   90.00 deg
Wood depth                :      0       (No woods.)
No of house rows          :      0 / 0
Surface                   :      2       (Reflective ground surface)
Receiver source distance  :  14.00 / 14.00  m
Receiver height           :   2.00 / 7.00   m
Topography                :      1       (Flat/gentle slope; no barrier)
Reference angle           :   0.00

Result summary (day)
--------------------
                     !  source  !   Road   !  Total
                     !  height  !   Leq    !   Leq
                     !   (m)    !  (dBA)   !  (dBA)
--------------------+---------+---------+---------
 1.Queensway Dr      !     1.11 !    61.01 !    61.01
--------------------+---------+---------+---------
                       Total                  61.01 dBA
Result summary (night)
----------------------
                     !  source  !   Road   !  Total
                     !  height  !   Leq    !   Leq
                     !   (m)    !  (dBA)   !  (dBA)
--------------------+---------+---------+---------
 1.Queensway Dr      !     1.10 !    54.47 !    54.47
--------------------+---------+---------+---------
                       Total                  54.47 dBA
STAMSON 5.04        NORMAL REPORT        Date: 02-06-2019 19:11:36
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: queensr1.te          Time Period: 24 hours
Description: R1- QEW Free Field Block 4 North Facade
                                  Total Leq All Segments: 70.75 dBA
Road data, segment # 1: Qew
---------------------------
Car traffic volume  : 167755 veh/TimePeriod  *
Medium truck volume : 16775 veh/TimePeriod  *
Heavy truck volume  : 25163 veh/TimePeriod  *
Posted speed limit  :   100 km/h
Road gradient       :     0 %
Road pavement       :     1 (Typical asphalt or concrete)

Data for Segment # 1: Qew
-------------------------
Angle1   Angle2           : -90.00 deg   90.00 deg
Wood depth                :      0       (No woods.)
No of house rows          :      0
Surface                   :      2       (Reflective ground surface)
Receiver source distance  : 115.00 m
Receiver height           :   2.00 m
```

```
Topography                :      1       (Flat/gentle slope; no barrier)
Reference angle           :   0.00

Results segment # 1: Qew
------------------------

Source height = 1.86 m

ROAD (0.00 + 70.75 + 0.00) = 70.75 dBA
Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj
SubLeq
-------------------------------------------------------------------------
--
   -90     90   0.63  86.62   0.00 -14.46  -1.41   0.00   0.00   0.00
70.75
-------------------------------------------------------------------------
--

Segment Leq : 70.75 dBA
```

```
STAMSON 5.04        SUMMARY REPORT        Date: 02-06-2019 21:00:04
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: queensr2.te          Time Period: 24 hours
Description: R2- QEW Field Block 4 & Block 1 North Facade
                                TOTAL Leq FROM ALL SOURCES:       72.35
Road data, segment # 1: Qew
---------------------------
Car traffic volume  : 167755 veh/TimePeriod  *
Medium truck volume : 16775 veh/TimePeriod  *
Heavy truck volume  : 25163 veh/TimePeriod  *
Posted speed limit  :   100 km/h
Road gradient       :     0 %
Road pavement       :     1 (Typical asphalt or concrete)

Data for Segment # 1: Qew
------------------------
Angle1   Angle2           : -90.00 deg   90.00 deg
Wood depth                :      0       (No woods.)
No of house rows          :      0
Surface                   :      2       (Reflective ground surface)
Receiver source distance  : 115.00 m
Receiver height           :   7.00 m
```

```
Topography                :      1       (Flat/gentle slope; no barrier)
Reference angle           :   0.00
```

Result summary

	source height (m)	Road Leq (dBA)	Total Leq (dBA)
1.Qew	1.86	72.35	72.35
Total			72.35 dBA

```
STAMSON 5.04        NORMAL REPORT        Date: 02-06-2019 19:56:26
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: queensr3.te          Time Period: 24 hours
Description: R3- QEW Free Field Block 4 & Block 1 East & West Facade
                     TOTAL Leq FROM ALL SOURCES:       66.98

Road data, segment # 1: Qew
---------------------------
Car traffic volume  : 167755 veh/TimePeriod  *
Medium truck volume : 16775 veh/TimePeriod  *
Heavy truck volume  : 25163 veh/TimePeriod  *
Posted speed limit  :   100 km/h
Road gradient       :     0 %
Road pavement       :     1 (Typical asphalt or concrete)

Data for Segment # 1: Qew
-------------------------
Angle1   Angle2           :  -0.00 deg   90.00 deg
Wood depth                :      0       (No woods.)
No of house rows          :      0
Surface                   :      2       (Reflective ground surface)
Receiver source distance  : 128.00 m
Receiver height           :   2.00 m
Topography                :      1       (Flat/gentle slope; no barrier)
Reference angle           :   0.00

Results segment # 1: Qew
------------------------

Source height = 1.86 m

ROAD (0.00 + 66.98 + 0.00) = 66.98 dBA
Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj
SubLeq
-------------------------------------------------------------------------------
   -0     90   0.63  86.62   0.00 -15.22  -4.42   0.00   0.00   0.00
66.98
-------------------------------------------------------------------------------

Segment Leq: 66.98 dBA

Total Leq All Segments: 66.98 dBA
```

```
STAMSON 5.04        NORMAL REPORT        Date: 02-06-2019 19:56:26
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: queensr3.te          Time Period: 24 hours
Description: R4- QEW Free Field Block 4 & Block 1 East & West Facade
                     TOTAL Leq FROM ALL SOURCES:       68.98

Road data, segment # 1: Qew
---------------------------
Car traffic volume  : 167755 veh/TimePeriod  *
Medium truck volume : 16775 veh/TimePeriod  *
Heavy truck volume  : 25163 veh/TimePeriod  *
Posted speed limit  :   100 km/h
Road gradient       :     0 %
Road pavement       :     1 (Typical asphalt or concrete)

Data for Segment # 1: Qew
-------------------------
Angle1   Angle2           :  -0.00 deg   90.00 deg
Wood depth                :      0       (No woods.)
No of house rows          :      0
Surface                   :      2       (Reflective ground surface)
Receiver source distance  : 128.00 m
Receiver height           :   7.00 m
Topography                :      1       (Flat/gentle slope; no barrier)
Reference angle           :   0.00

Results segment # 1: Qew
------------------------
Source height = 1.86 m

ROAD (0.00 + 66.98 + 0.00) = 66.98 dBA
Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj
SubLeq
-------------------------------------------------------------------------------
-0     90   0.63  86.62   0.00 -15.22  -4.42   0.00   0.00   0.00  68.98
-------------------------------------------------------------------------------
Segment Leq : 68.98 dBA
Total Leq All Segments: 68.98 dBA
Result summary
--------------
                    !  source  !   Road   !  Total
                    !  height  !   Leq    !   Leq
                    !   (m)    !  (dBA)   !  (dBA)
--------------------+---------+---------+---------
 1.Qew              !     1.86 !    68.98 !    68.98
--------------------+---------+---------+---------
                      Total                  68.98 dBA
```

```
STAMSON 5.04        NORMAL REPORT        Date: 02-06-2019 20:19:00
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: queensR6.te          Time Period: 24 hours
Description: R5- QEW Free Field Block 4 North Facade First Floor
                              TOTAL Leq FROM ALL SOURCES:       66.37
Road data, segment # 1: Qew
---------------------------
Car traffic volume  : 167755 veh/TimePeriod  *
Medium truck volume : 16775 veh/TimePeriod  *
Heavy truck volume  : 25163 veh/TimePeriod  *
Posted speed limit  :   100 km/h
Road gradient       :     0 %
Road pavement       :     1 (Typical asphalt or concrete)

Data for Segment # 1: Qew
-------------------------
Angle1   Angle2           :  -0.00 deg   90.00 deg
Wood depth                :      0       (No woods.)
No of house rows          :      0
Surface                   :      2      (Reflective ground surface)
Receiver source distance  : 128.00 m
Receiver height           :   2.00 m
Topography                :      1       (Flat/gentle slope; no barrier)
Reference angle           :   0.00
Results segment # 1: Qew
-----------------------
Source height = 1.86 m

ROAD (0.00 + 67.37 + 0.00) = 67.37 dBA
Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj
SubLeq
-------------------------------------------------------------------------------
 -0     90   0.48  84.62   0.00 -15.09  -4.16   0.00   0.00   0.00  66.37
-------------------------------------------------------------------------------
Segment Leq : 66.37 dBA
Total Leq All Segments: 66.37 dBA
```

```
STAMSON 5.04        NORMAL REPORT        Date: 02-06-2019 20:19:00
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: queensR6.te          Time Period: 24 hours
Description: R6- QEW Free Field Block 3 North Facade
                              TOTAL Leq FROM ALL SOURCES:       67.37
Road data, segment # 1: Qew
----------------------------
Car traffic volume  : 167755 veh/TimePeriod  *
Medium truck volume : 16775 veh/TimePeriod  *
Heavy truck volume  : 25163 veh/TimePeriod  *
Posted speed limit  :   100 km/h
Road gradient       :     0 %
Road pavement       :     1 (Typical asphalt or concrete)

Data for Segment # 1: Qew
-------------------------
Angle1   Angle2           :  -0.00 deg   90.00 deg
Wood depth                :      0       (No woods.)
No of house rows          :      0
Surface                   :      2       (Reflective ground surface)
Receiver source distance  : 156.00 m
Receiver height           :   7.00 m
Topography                :      1       (Flat/gentle slope; no barrier)
Reference angle           :   0.00

Results segment # 1: Qew
------------------------

Source height = 1.86 m

ROAD (0.00 + 67.37 + 0.00) = 67.37 dBA
Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj
SubLeq
-------------------------------------------------------------------------
--
    -0     90   0.48  86.62   0.00 -15.09  -4.16   0.00   0.00   0.00
67.37
-------------------------------------------------------------------------
--

Segment Leq : 67.37 dBA

Total Leq All Segments: 67.37 dBA
```


```
STAMSON 5.04        SUMMARY REPORT        Date: 02-06-2019 20:12:25
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: Queensway             Time Period: Day/Night 16/8 hours
Description: R7- REAR YARD OLA's East Side 3M Noise Barrier
                                TOTAL Leq FROM ALL SOURCES (DAY): 54.70

Road data, segment # 1: QEW
----------------------------------------------
Car traffic volume  : 167755veh TimePeriod  *
Medium truck volume : 16775     veh/TimePeriod  *
Heavy truck volume  : 25163     veh/TimePeriod  *
Posted speed limit  :    100    km/h
Road gradient       :     0 %
Road pavement       :     1 (Typical asphalt or concrete)

Data for Segment # 1: New Street (day/night)
----------------------------------------------
Angle1   Angle2           : -90.00 deg   90.00 deg
Wood depth                :      0       (No woods.)
No of house rows          :      0
Surface                   :      2       (Reflective ground surface)
Receiver source distance  :  114.00
Receiver height           :   1.50
Topography                :      2       (Flat/gentle slope; with barrier)
Barrier angle1            : -90.00 deg   Angle2 : 90.00 deg
Barrier height            :   3.00 m
Barrier receiver distance :   3.00 m
Source elevation          :   0.00 m
Receiver elevation        :   0.00 m
Barrier elevation         :   0.00 m
Reference angle           :   0.00
Result summary (day)
--------------------
                    !  source  !   Road   !  Total
                    !  height  !   Leq    !   Leq
                    !   (m)    !  (dBA)   !  (dBA)
--------------------+---------+---------+---------
 1.QEW              !     1.00 !    54.70 !    54.70
--------------------+---------+---------+---------
                      Total                  54.70 dBA
```

SITE STATISTICS

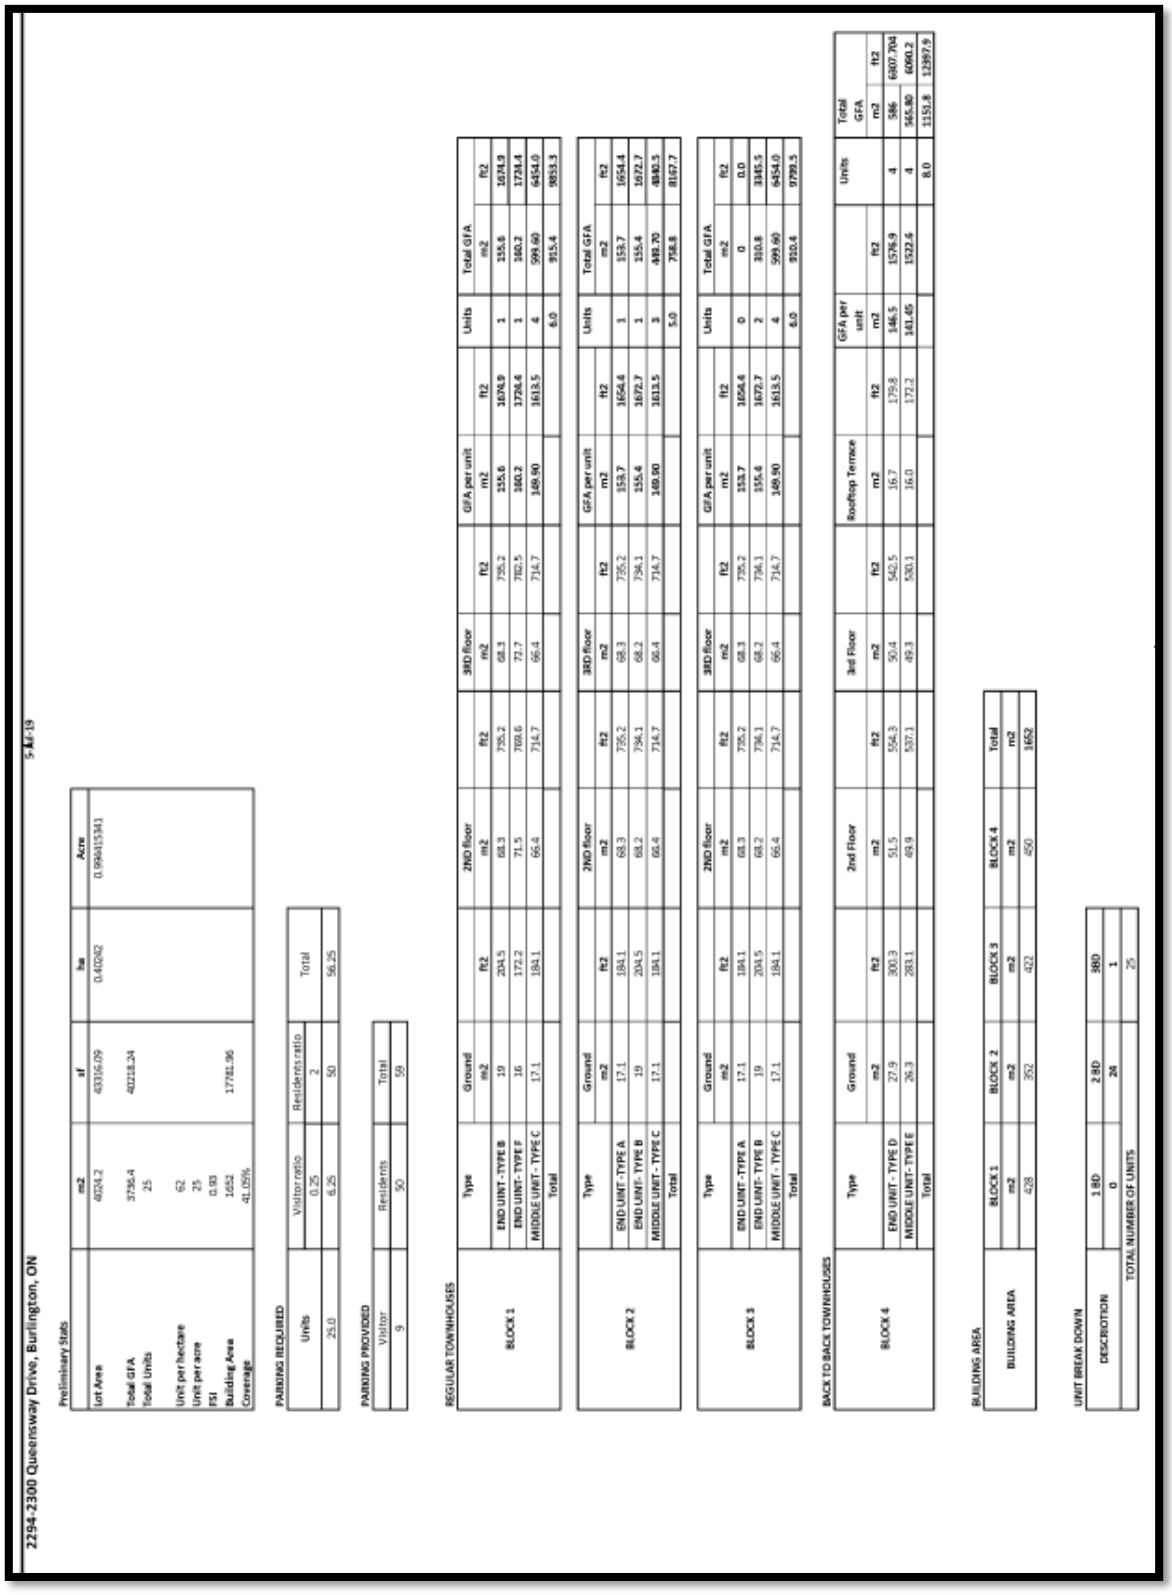

2294-2300 Queensway Drive, Burlington, ON

5-Apr-19

Preliminary Stats

	m2	sf	ha	Acre
Lot Area	4024.2	43316.09	0.40242	0.994615341
Total GFA	3736.4	40218.24		
Total Units	25			
Unit per hectare	62			
Unit per acre	25			
FSI	0.93			
Building Area	1652	17781.96		
Coverage	41.05%			

PARKING REQUIRED

Units	Visitor ratio	Residents ratio	Total
	0.25	2	
25.0	6.25	50	56.25

PARKING PROVIDED

Visitor	Residents	Total
9	50	59

REGULAR TOWNHOUSES

	Type	Ground		2ND floor		3RD floor		GFA per unit		Units	Total GFA	
		m2	ft2	m2	ft2	m2	ft2	m2	ft2		m2	ft2
BLOCK 1	END UNIT - TYPE B	19	204.5	68.3	735.2	68.3	735.2	155.6	1674.9	1	155.6	1674.9
	END UNIT- TYPE F	16	172.2	71.5	769.6	72.7	782.5	160.2	1724.4	1	160.2	1724.4
	MIDDLE UNIT - TYPE C	17.1	184.1	66.4	714.7	66.4	714.7	149.90	1613.5	4	599.60	6454.0
	Total									6.0	915.4	9853.3
BLOCK 2	END UNIT - TYPE A	17.1	184.1	68.3	735.2	68.3	735.2	153.7	1654.4	1	153.7	1654.4
	END UNIT- TYPE B	19	204.5	68.2	734.1	68.2	734.1	155.4	1672.7	1	155.4	1672.7
	MIDDLE UNIT - TYPE C	17.1	184.1	66.4	714.7	66.4	714.7	149.90	1613.5	3	449.70	4840.5
	Total									5.0	758.8	8167.7
BLOCK 3	END UNIT - TYPE A	17.1	184.1	68.3	735.2	68.3	735.2	153.7	1654.4	0	0	0.0
	END UNIT- TYPE B	19	204.5	68.2	734.1	68.2	734.1	155.4	1672.7	2	310.8	3345.5
	MIDDLE UNIT - TYPE C	17.1	184.1	66.4	714.7	66.4	714.7	149.90	1613.5	4	599.60	6454.0
	Total									6.0	910.4	9799.5

BACK TO BACK TOWNHOUSES

	Type	Ground		2nd Floor		3rd Floor		Rooftop Terrace		GFA per unit		Units	Total GFA	
		m2	ft2	m2	ft2	m2	ft2	m2	ft2	m2	ft2		m2	ft2
BLOCK 4	END UNIT - TYPE D	27.9	300.3	51.5	554.3	50.4	542.5	16.7	179.8	146.5	1576.9	4	586	6307.704
	MIDDLE UNIT - TYPE E	26.3	283.1	49.9	537.1	49.3	530.1	16.0	172.2	141.45	1522.4	4	565.80	6090.2
	Total											8.0	1151.8	12397.9

BUILDING AREA

	BLOCK 1	BLOCK 2	BLOCK 3	BLOCK 4	Total
BUILDING AREA	m2	m2	m2	m2	m2
	428	352	422	450	1652

UNIT BREAK DOWN

DESCRIPTION	1 BD	2 BD	3BD
	0	24	1
TOTAL NUMBER OF UNITS			25

EXTERIOR WALL STC RATINGS

EXTERIOR WALL STC RATINGS

Wall Configuration	EW1	EW2	EW3	EW4	EW1R	EW2R	EW3R	EW5	EW4R	EW6	EW7 EW5R	EW8
STC Rating	**38**	**40**	**43**	**46**	**47**	**48**	**49**	**54**	**55**	**57**	**58**	**62**

Source: National Research Council, Division of Building Research

NOTES:

1 The common structure of walls EW1 to EW5 is composed of 12.7mm gypsum board, vapour barrier and 38x89 mm studs with 50 mm (or thicker) mineral wool or glass fibre batts in inter-stud cavities.

- EW1 denotes the common structure, plus sheathing, plus wood siding or metal siding and fibre backer board
- EW2 denotes the common structure, plus rigid insulation (25 to 30 mm), and wood siding or metal siding and fibre backer board.
- EW3 denotes simulated mansard with the common structure, plus sheathing, 28 X89 mm framing, sheathing and asphalt roofing material
- EW4 denotes the common structure, plus sheathing and 20 mm stucco.
- EW5 denotes the common structure, plus sheathing, 25 mm air space, 100mm brick veneer.
- EW6 denotes exterior wall composed of 12.7 mm gypsum board, rigid insulation (25 to 50 mm), 100 mm back-up block 100 mm face brick.
- EW7 denotes exterior wall composed of 12.7 mm gypsum board, rigid insulation (25 to 50 mm), 140mm back-up block, 100 mm face brick.
- EW8 denotes exterior wall composed of 12.7 mm gypsum board, rigid insulation (25 to 50 mm), 200 mm concrete.

2 R signifies the mounting of the interior gypsum board on resilient clips.


3 An exterior wall conforming to rainscreen design principles and composed of 12.7 mm gypsum board, 100 mm concrete block, rigid insulation (25 to 50 mm), 25 mm air space, and 100 mm brick veneer has the same STC as EW6.


4 An exterior wall described in EW1 with the addition of rigid insulation (25 to 50 mm) between the sheathing and the external finish has the same STC as EW2.

ELEVATION PLANS


3
6
10
7
3
1
2
12
9
10
12
25.51
1.83
5.02
1.88
1.88
1.88
5.02
0.30
10.30
9.60
3.00
3.40
3.00
TBD
TYPE F
TYPE C
TYPE C
TYPE C
TYPE A
01
A201
BLOCK 1 – WEST ELEVATION
1:200


12
4
1
4
12
7
25.51
5.02
4.88
4.88
4.88
5.87
0.30
0.40
10.30
9.60
3.00
3.10
3.00
TBD
TYPE A
TYPE C
TYPE C
TYPE C
TYPE F
02
A201
BLOCK 1– EAST ELEVATION
1:200

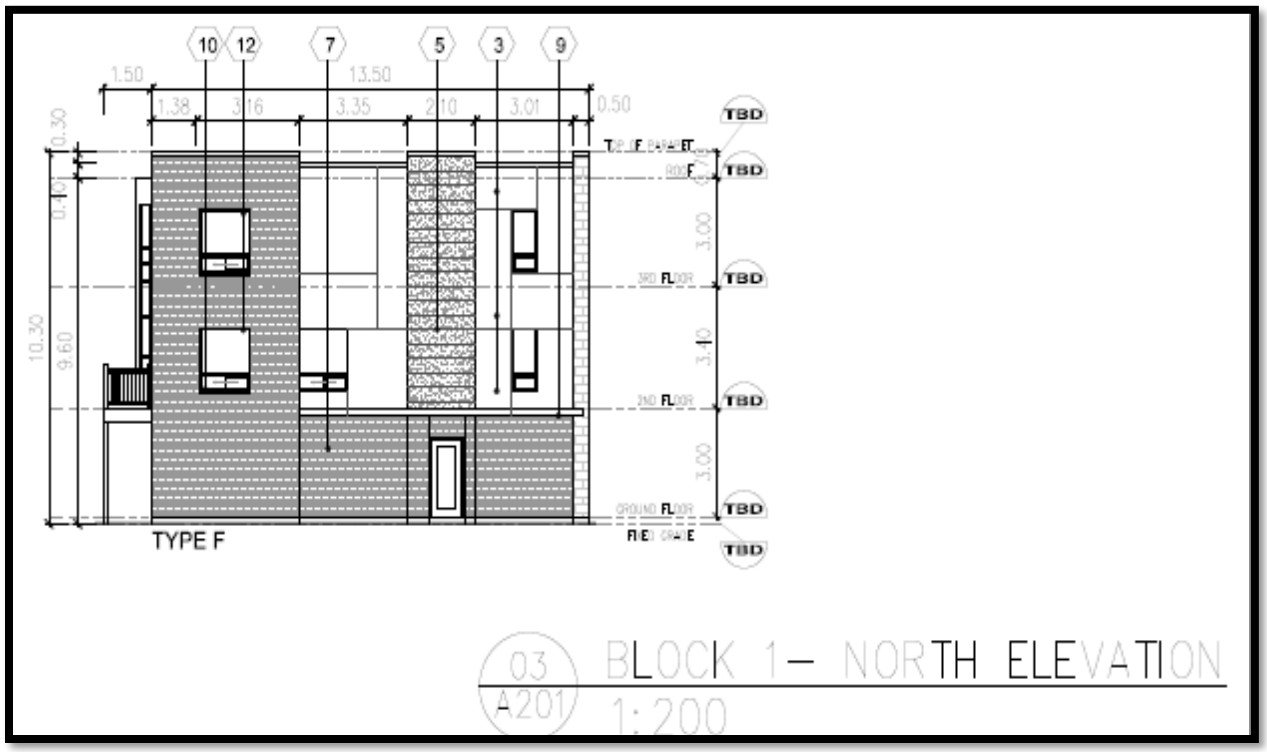

10
12
7
5
3
9
1.50
13.50
1.38
3.16
3.35
2.10
3.01
0.50
0.30
0.40
10.30
9.60
3.00
3.10
3.00
TBD
TYPE F
03
A201
BLOCK 1– NORTH ELEVATION
1:200

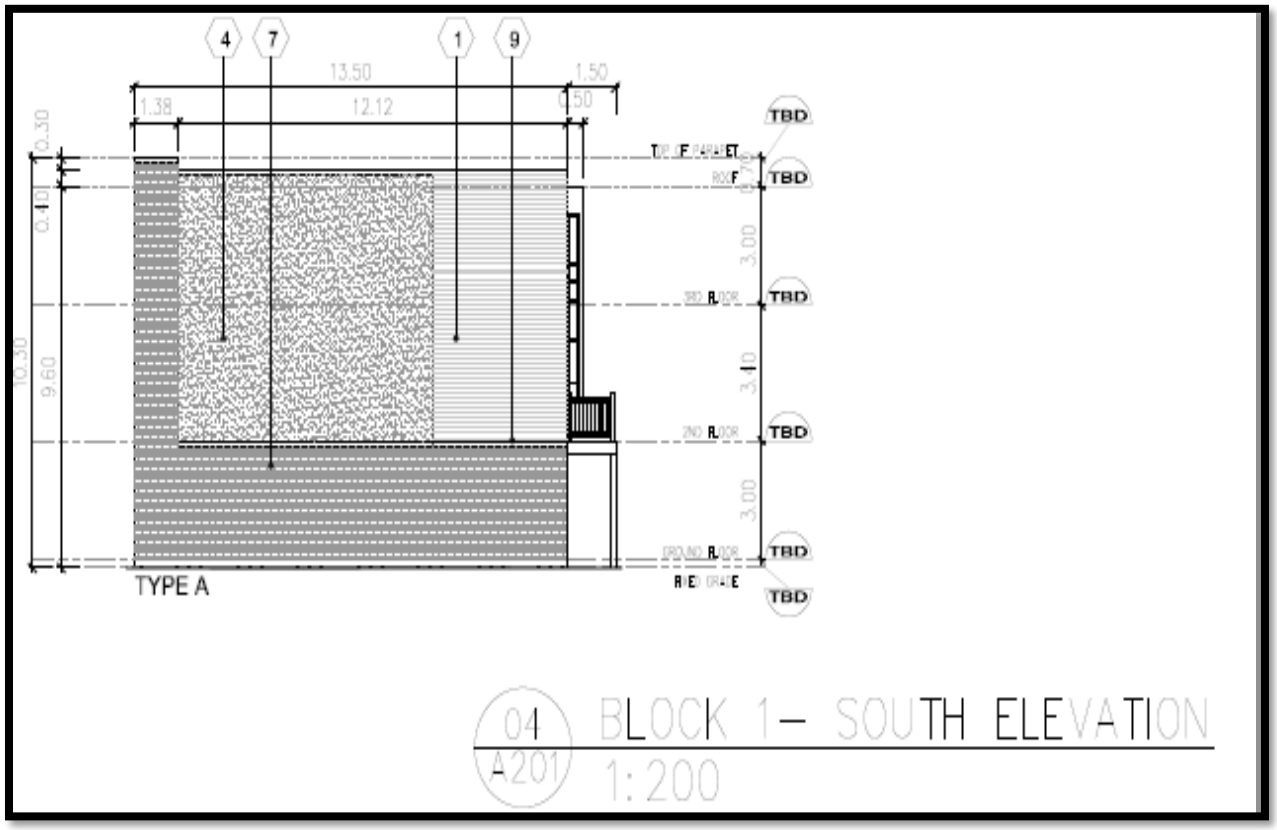



BLOCK 1– SOUTH ELEVATION




BLOCK 2– WEST ELEVATION

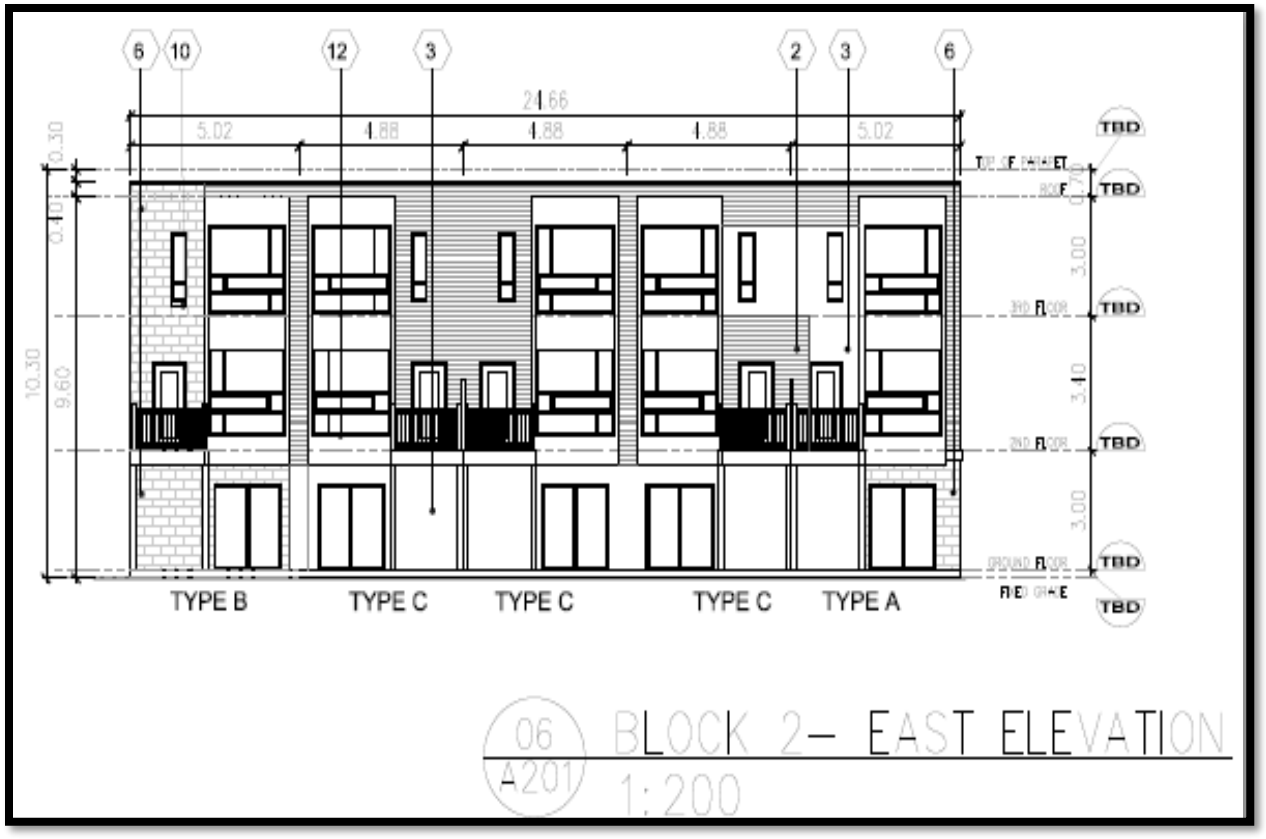
6
10
12
3
2
3
6
24.66
5.02
4.88
4.88
4.88
5.02
TBD
TBD
TBD
TBD
TBD
TBD
3.00
3.10
3.00
10.30
9.60
TYPE B
TYPE C
TYPE C
TYPE C
TYPE A
06
A201
BLOCK 2– EAST ELEVATION
1:200

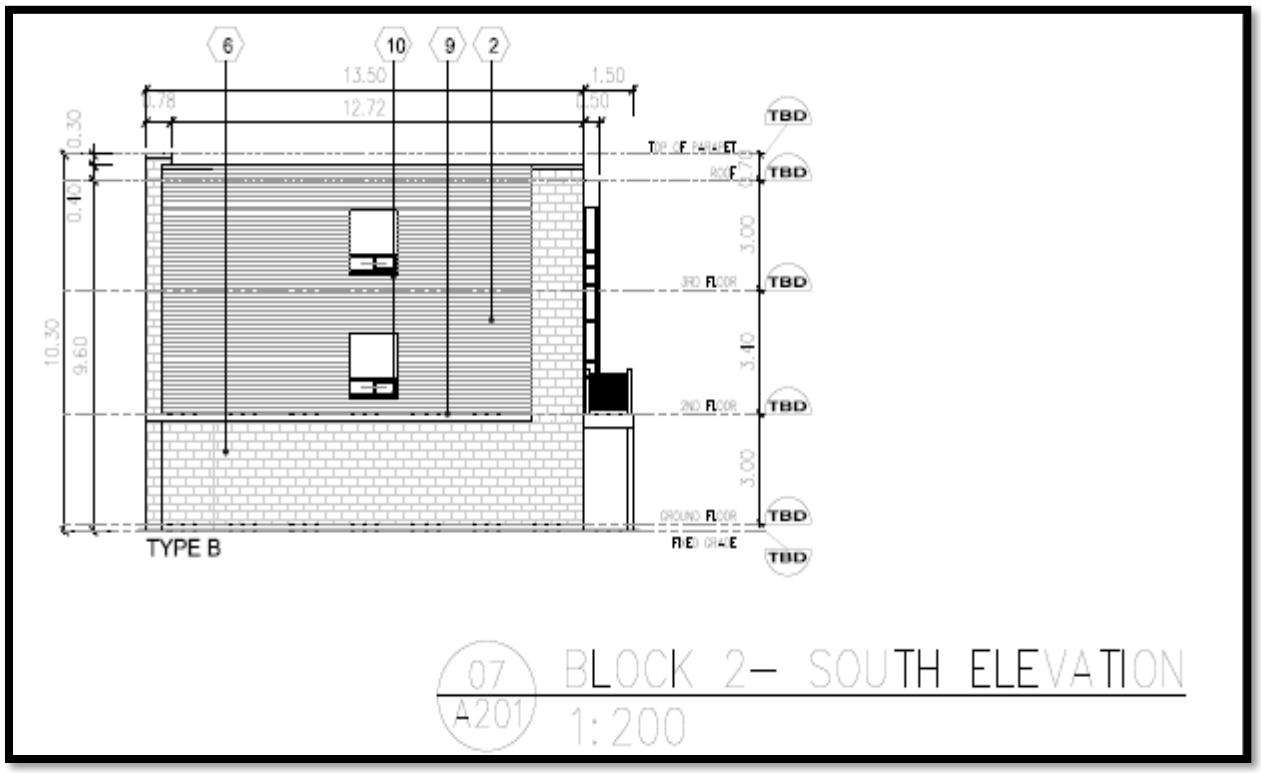

6
10
9
2
13.50
1.50
.78
12.72
.50
0.30
0.40
10.30
9.60
3.00
3.10
3.00
TBD
TOP OF PARAPET
ROOF
3RD FLOOR
2ND FLOOR
GROUND FLOOR
FINISH GRADE
TYPE B
07
A201
BLOCK 2– SOUTH ELEVATION
1:200

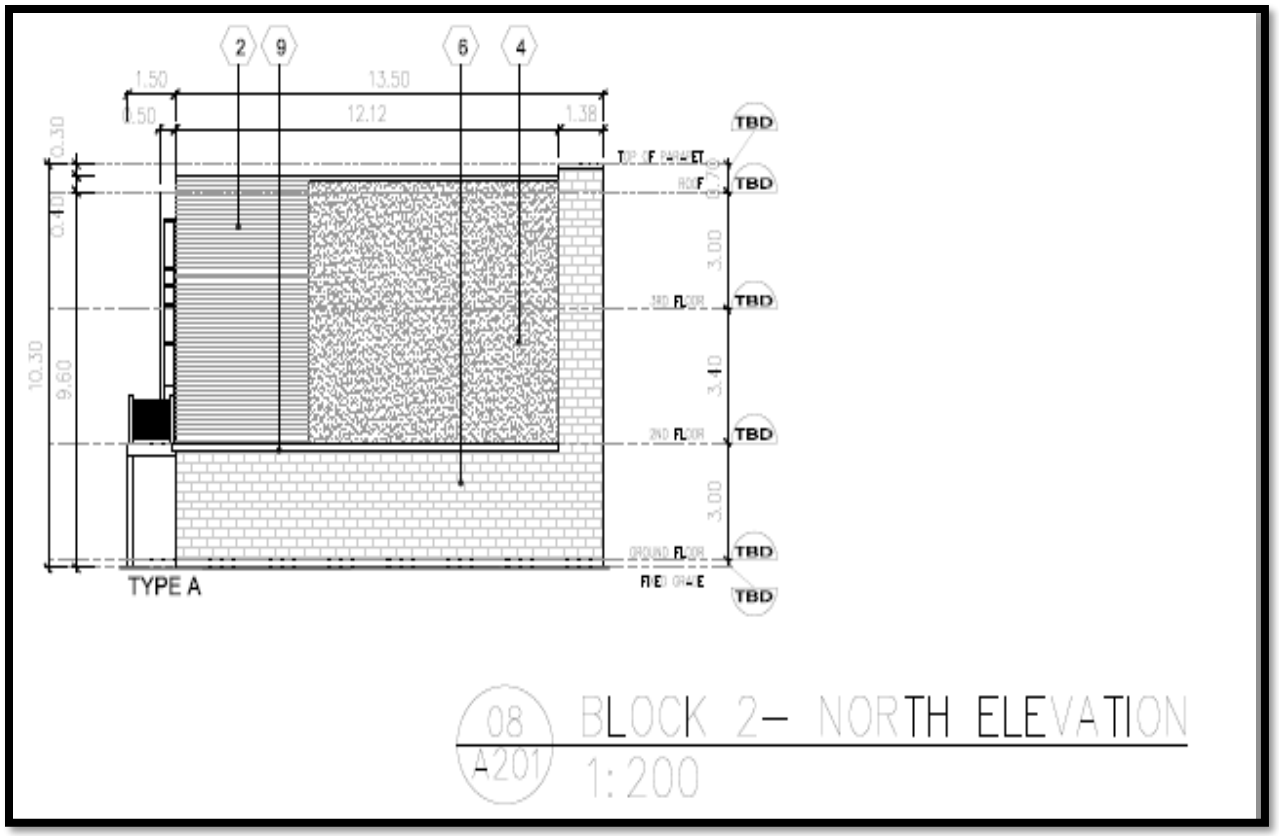
2
9
6
4
1.50
13.50
1.50
12.12
1.38
0.30
0.40
10.30
9.60
3.00
3.10
3.00
TBD
TOP OF PARAPET
ROOF
3RD FLOOR
2ND FLOOR
GROUND FLOOR
FINISH GRADE
TYPE A
08
A201
BLOCK 2– NORTH ELEVATION
1:200



6
10
9
12
2
4
3
6
10
6
12
2
21.66
5.02
1.88
1.88
1.88
5.02
0.30
0.15
10.30
9.60
3.00
3.10
3.00
TBD
TBD
TBD
TBD
TBD
TBD
TYPE A
TYPE C
TYPE C
TYPE C
TYPE B
09
A201
BLOCK 3– NORTH ELEVATION
1:200

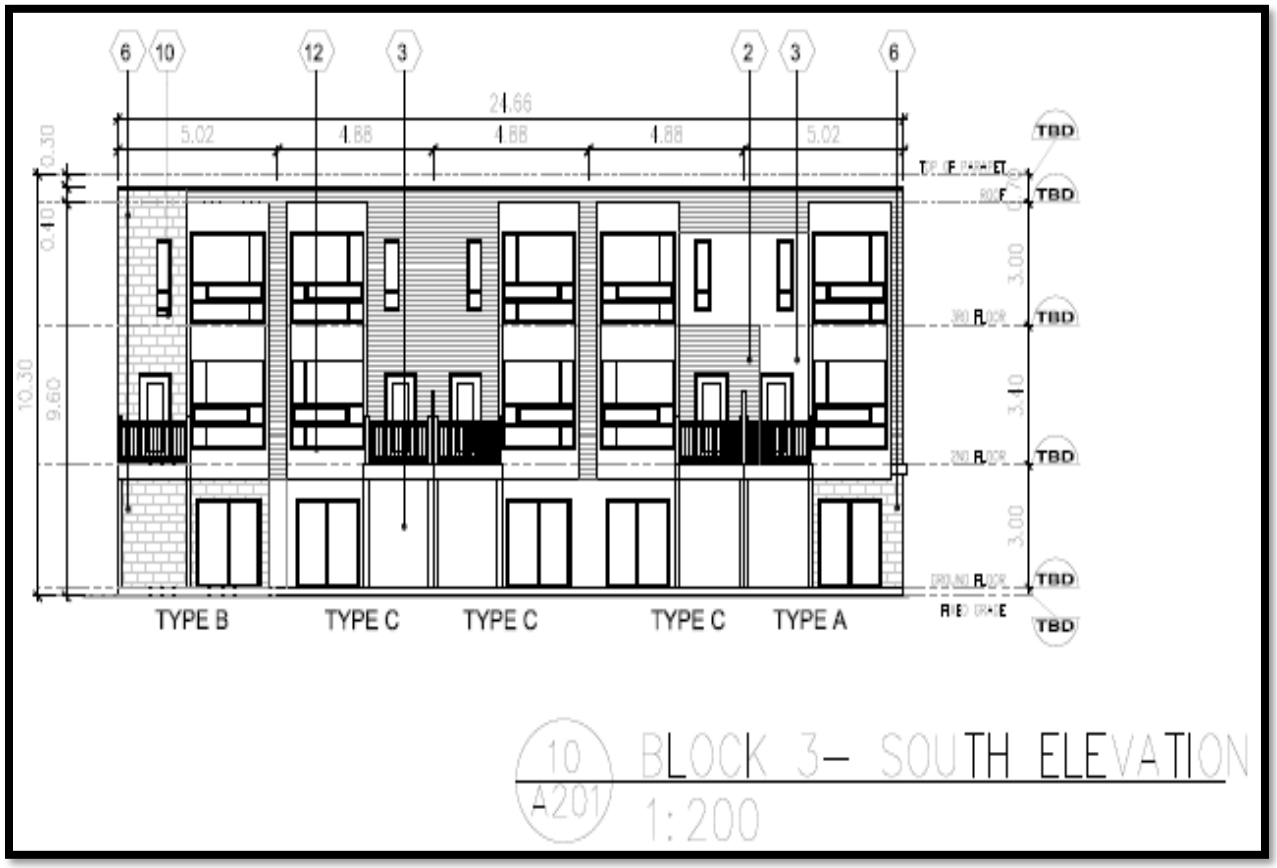


10 A201 BLOCK 3– SOUTH ELEVATION
1:200

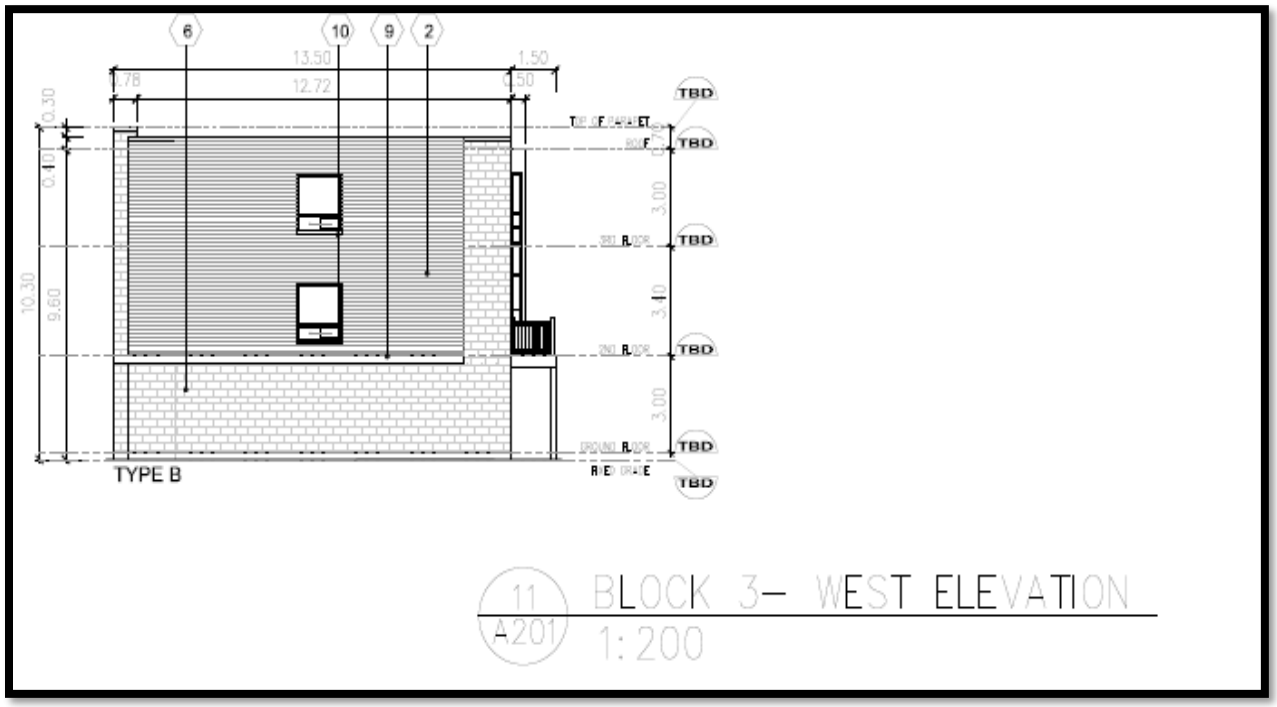

11 A201 BLOCK 3– WEST ELEVATION
1:200

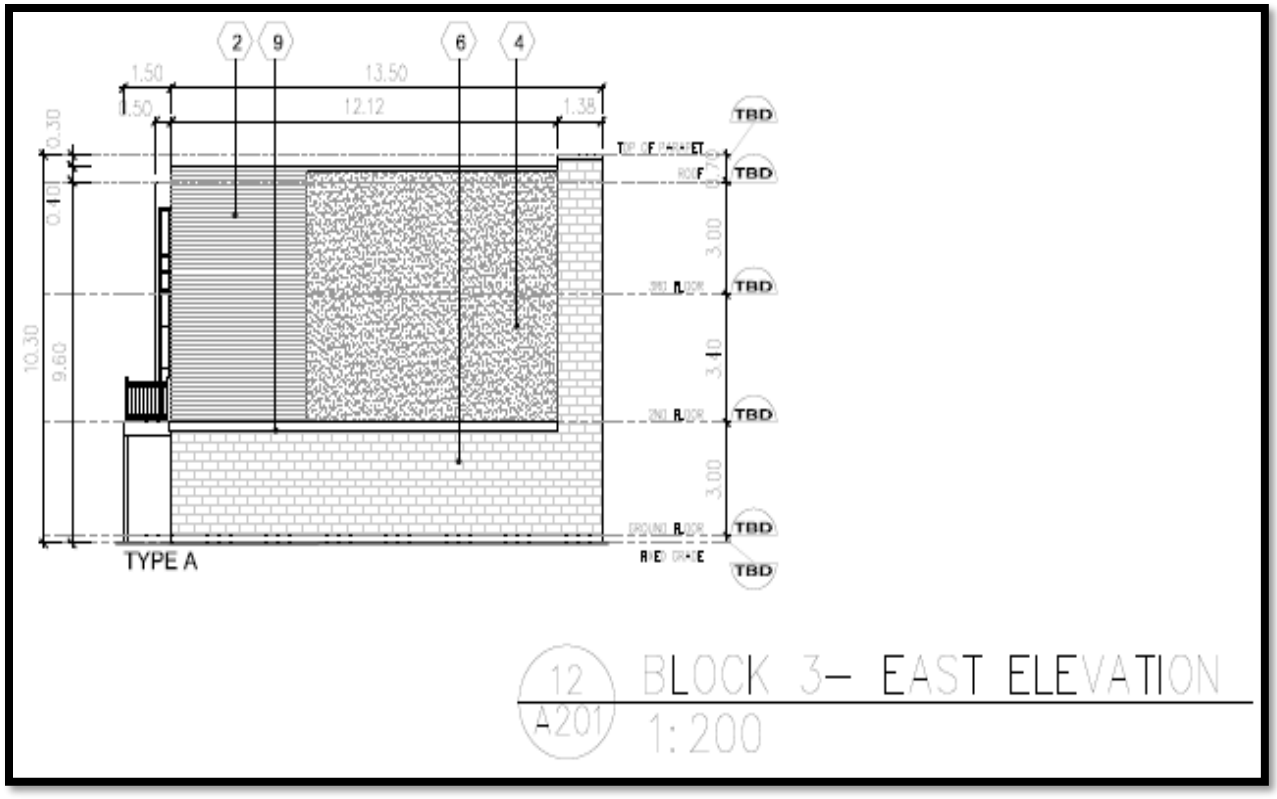
2
9
6
4
1.50
13.50
1.50
12.12
1.38
0.30
0.10
10.30
9.60
3.00
3.10
3.00
TBD
TBD
TBD
TBD
TBD
TBD
TYPE A
12
A201
BLOCK 3– EAST ELEVATION
1:200


12
3
12
1
5
3
8
1
1
8
11
25.88
6.51
6.40
6.40
6.51
TBD
TBD
TBD
TBD
TBD
TBD
2.80
3.00
3.40
3.00
1.90
0.30
0.90
12.40
9.60
TYPE D
TYPE E
TYPE D
TYPE E
13
A201
BLOCK 4– NORTH AND SOUTH ELEVATIONS
1:200

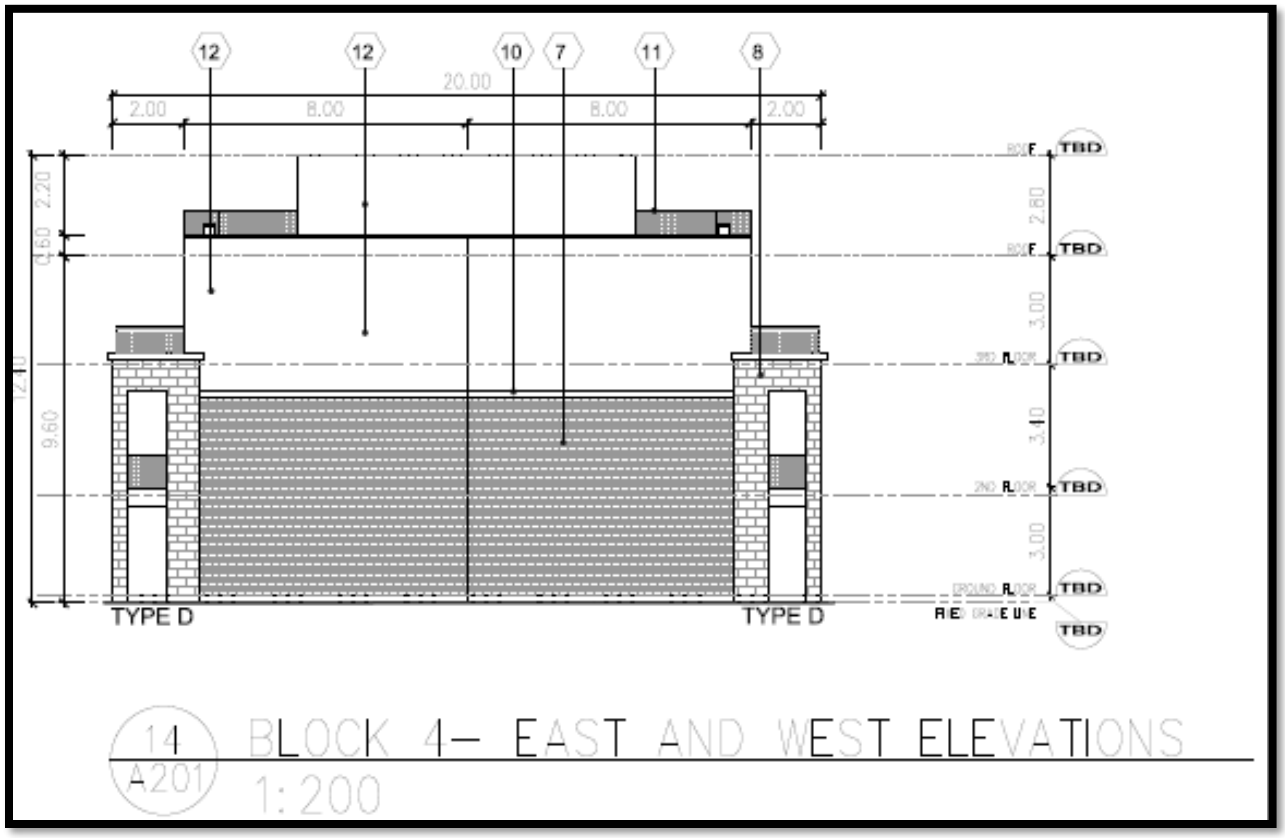
12
12
10
7
11
8
20.00
2.00
8.00
8.00
2.00
TBD
TBD
TBD
TBD
TBD
TBD
TYPE D
TYPE D
14
A201
BLOCK 4– EAST AND WEST ELEVATIONS
1:200




ICON
ARCHITECTS


ICON
ARCHITECTS


ICON
ARCHITECTS